

EAK



CATALOGUE

E

A

K

Adjustable gauged wrench (left-threaded)

649...L

NEW



| Part no. | Size | Length | Weight | Packing |
|----------|------|--------|--------|--------------------|
| | mm | mm | g | Q'ty/N.W/G.W/CUFT |
| 649150L | 20 | 150 | 134 | 100/13.4/14.4/1.4' |
| 649200L | 24 | 200 | 240 | 60/14.4/15.4/1.1' |
| 649250L | 29 | 250 | 424 | 30/12.7/13.7/0.96' |
| 649300L | 33 | 300 | 681 | 20/13.6/14.6/0.87' |
| 649450L | 60 | 450 | 1760 | 10/17.6/18.6/0.7' |

Black suitcase with 106pcs of tools

50234-107S



| Part no. | Contents: |
|----------------|--|
| 711 1N...2N | 2-Insulated Phillips screwdriver PH.1; PH.2 |
| 713 03N...065N | 4-Insulated slotted screwdriver 3; 4; 5.5; 6.5 |
| 7112S | 1-Phillips stubby screwdriver PH.2 |
| 713065S | 1-Slotted stubby screwdriver 6.5 |
| 711 1...3 | 3-Phillips screwdriver PH.1; PH.2; PH.3 |
| 6907250 | 1-Insulated water pump pliers (Curved jaw) 10" |
| 649250A | 1-Adjustable gauged wrench 250mmL |
| 6904160 | 1-Insulated long nose pliers 6" |
| 6903180 | 1-Insulated combination pliers 7" |
| 6905160 | 1-Insulated diagonal cutting pliers 6" |
| 6912160 | 1-Insulated wire stripper pliers 6" |





1/12.7/13.7/1.65'



Bolt cutter

9U0501



| |  | <i>l</i> |  |
|----------|---|----------|---|
| Part no. | packing | Length | g |
| 9U050130 | 6/23.8/24.8/2.1' | 762-30" | 3967 |
| 9U050136 | 5/30.4/31.4/1.8' | 863-36" | 6080 |
| 9U050142 | 3/28.0/29.0/2' | 1066-42" | 9330 |

Bolt Cutters

HN00310



- + Centre cut jaw pattern
- + Drop forged handles
- + Carbon steel jaws hardened to give long life
- + For cutting high tensile material up to 40HRC

Air blow gun

9U0202 / 9U0203



9U0202

It is suitable for removing and cleaning any kinds of chip.

Specification:

- Length: 4" (9U0202) / 13" (9U0203)
- Working pressure: 78~120 PSI / 5~8 KGS
- Thread type: 1/4"



9U0203

9U0202  60/10/11/1.6'  167g

9U0203  50/12/13.5/2.9'  240g



Inflating Gun

D.I.Y

Suitable for: Inflating car tyres, bicycle tyres, air beds & inflatables, footballs etc
PAB1204



Suction Feed Low Pressure Spraygun

D.I.Y

Feed type: Pressure
Standard nozzle: 1.3mm
Optional nozzle: 1.2mm
Average air consumption:
3CFM / 85L/min
Cup Capacity: 0.8L
Recommended Air
Pressure: 10 -40Psi
Canister Capacity: 0.8L
Paint Nozzle: 1.3mm
TOOS1784



Suction Feed High Pressure Spray Gun

Industrial

Standard Nozzle: 1.6mm
Cup Capacity: 1L
Avg Air Consumption:
10CFM / 280L/min
Recommended Air Pressure:
355 - 480kPA/ 3.5 - 4.8 bar
Canister Capacity: 0.8L
Adjustable spray pattern
Non-bleeder type, siphon feed
External mix nozzle
Dual Action trigger
Air inlet 1/4" BSP
Paint nozzle: 2.0mmØ
Professional quality
Min recommended compressor:
2HP/ 1.5KW and above
TOOS1785



Air Duster

Semi-Industrial

Short nozzle

Maximum pressure: 9 bar
Min compressor required: 1.1KW
Pressure required: 3 - 8 bar
Suitable for blowing and
cleaning away cuttings etc
TOOS1751



Blow Gun

Semi-Industrial

Extended nozzle

Air inlet: 6.5mm
Suitable for unblocking oilways
in engines & machine parts,
cleaning electrical circuit boards
& computers, general cleaning
duties in & around the workshop
PAB1208

CUSHION GRIP 6 PIECE PARALLEL/FLARED/PHILLIPS SET



- Parallel 6.5mm X 200mm
- Flared Instrument 3mm X 75mm, 5mm X 100mm, 6.5mm X 150mm
- Phillips PH1 X 75mm, PH2 X 150mm

| SKU | DESCRIPTION |
|----------|-------------------------------|
| 0-65-007 | 6pce Parallel/Flared/Phillips |


CUSHION GRIP 6 PIECE FLARED/PHILLIPS SET



- Flared 5mm X 100mm, 6.5mm X 45mm, 6.5mm X 150mm
- Phillips PH1 X 75mm, PH2 X 45mm, PH2 X 100mm
- Voltage Tester

| SKU | DESCRIPTION |
|----------|----------------------|
| 0-65-009 | 6pce Flared/Phillips |

6 PCS CUSHION GRIP™ SCREWDRIVER SET WITH BONUS (TESTER INCLUDED)




- Phillips® PH1 x 100mm
- Phillips® PH2 x 45mm
- Phillips® PH2 x 100mm
- Slotted 5mm x 100mm
- Slotted 6.5mm x 45mm
- Slotted 6.5mm x 100mm



| SKU # | Description | Box Qty |
|-------------|--|---------|
| STHT92002-8 | 6 PCS Cushion Grip™ Screwdriver Set with Bonus (Tester included) | 12 |

8 PCS CUSHION GRIP™ SCREWDRIVER SET




- Phillips® PH0 x 60mm
- Phillips® PH1 x 100mm
- Phillips® PH2 x 45mm
- Phillips® PH2 x 150mm
- Slotted 3mm x 75mm
- Slotted 5mm x 100mm
- Slotted 6.5mm x 45mm
- Slotted 6.5mm x 150mm



| SKU # | Description | Box Qty |
|-------------|-------------------------------------|---------|
| STHT92004-8 | 8 PCS Cushion Grip™ Screwdriver Set | 12 |

6 PCS CUSHION GRIP™ SCREWDRIVER SET



- Phillips® PH1 x 100mm
- Phillips® PH2 x 150mm
- Std Parallel 5mm x 100mm
- Std Parallel 5mm x 150mm
- Slotted 6.5mm x 150mm
- Slotted 5mm x 100mm



| SKU # | Description | Box Qty |
|-------------|-------------------------------------|---------|
| STHT65242-8 | 6 PCS Cushion Grip™ Screwdriver Set | 12 |

7 PCS VDE SCREWDRIVER SET

- 3.0 x 100mm
- 4.0 x 100mm
- 5.5 x 125mm
- 6.5 x 150mm

- PH1 x 80mm
- PH2 x 100mm

3.0 x 70mm




- Insulation directly injection-moulded around the blade
- Ergonomic, shock resistant, anti slip handle and for greater torque to be applied with less effort
- Each screwdriver is individually tested to 10,000V in a water bath for 10 SCEa



| SKU # | Description |
|-------------|---------------------------|
| STHT65980-8 | 7 PCS VDE Screwdriver Set |




PVC HANDLE SLOTTED FLARED

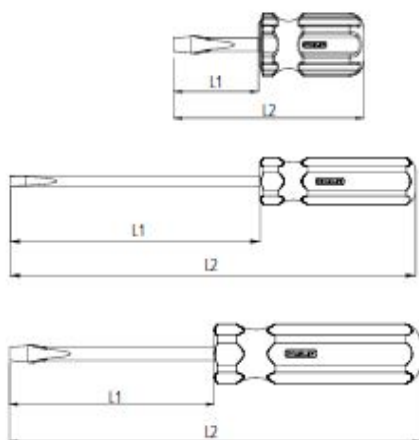

- Comfortable handle
- Chrome plated Cr-V bar resists corrosion
- Magnetic tips for secure grip on fasteners
- Color coordinated handles: red (standard), blue (Phillips®), black (Torx)



CUSHION GRIP™ SLOTTED FLARED

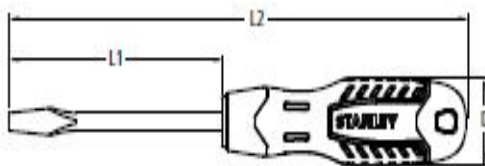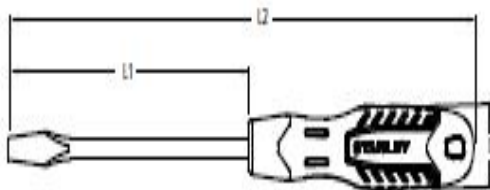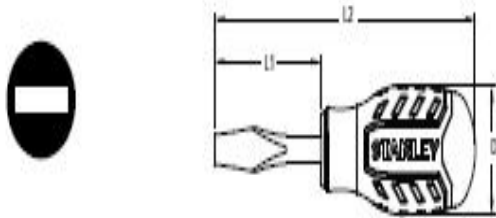

- Bi-material (PP+TPR) soft grip handle providing excellent comfort
- Chrome Vanadium (Cr-V) blade for durability
- Magnetic tips for easy pick up and screw locator
- Three-sided handle allowing more torque with anti-slip and anti rolling features reducing handle slippage
- Ergonomic design with finger point in neck-down area for precise control
- Built-in hang hole for easy storage
- Screw tip identification on the handle for organization





| DIAMOND ADJUSTABLE WRENCH | | | |
|---------------------------|--------------|----------------------|-----------|
| ITEM CODE | SIZE | LIST PRICE (RM) / PC | PCS / CTN |
| ADJ-15" | 15" - 3750MM | | 6 PCS |
| ADJ-18" | 18" - 450MM | | 6 PCS |
| ADJ-24" | 24" - 600MM | | 6 PCS |

ADJUSTABLE WRENCHES



| SKU | OLD SKU | TYPE | DESCRIPTION |
|-------------|-------------|-------------------|-------------|
| 87-430-1-23 | - | Adjustable Wrench | 100mm / 4" |
| STMT87431-8 | 1-87-431 | Adjustable Wrench | 150mm / 6" |
| STMT87432-8 | 87-432-1-23 | Adjustable Wrench | 200mm / 8" |
| STMT87433-8 | 87-433-1-23 | Adjustable Wrench | 250mm / 10" |
| STMT87434-8 | 87-434-1-23 | Adjustable Wrench | 300mm / 12" |
| STMT87435-8 | 87-435-1-23 | Adjustable Wrench | 375mm / 15" |
| 1-87-371 | - | Adjustable Wrench | 450mm / 18" |
| 97-797 | - | Adjustable Wrench | 600mm / 24" |

WRENCH & HANDLE



Slimline 9 Piece Combination Wrench Set

| Product Code | CONTENTS | Weight (g) | Box/ Ctn | List Price RM/set | Offer Price RM/set |
|--------------|---|------------|----------|-------------------|--------------------|
| 87-034-1 | 8, 9, 10, 11, 12, 13, 14, 15, 17mm Heavy-duty nylon pouch, Inner box | 910 | 1/16 | 191.40 | |
| 87-033-1 | 10, 11, 12, 13, 14, 15, 16, 17, 19mm Heavy-duty nylon pouch, Inner box | 1490 | 1/16 | 209.70 | |



NEW GEAR WRENCHES



- Cr-V material
- Mirror finish
- Anti-slip open ends
- 5° increment

| SKU | TYPE | DESCRIPTION |
|--------------|-------------|-------------|
| STMT89934-8B | Gear Wrench | 8 MM |
| STMT89936-8B | Gear Wrench | 10 MM |
| STMT89937-8B | Gear Wrench | 12 MM |
| STMT89938-8B | Gear Wrench | 13 MM |
| STMT89939-8B | Gear Wrench | 14 MM |
| STMT89940-8B | Gear Wrench | 15 MM |
| STMT89941-8B | Gear Wrench | 16 MM |
| STMT89944-8B | Gear Wrench | 19 MM |

Slimline 12 Piece Combination Wrench Set

| Product Code | Contents | Weight (g) | Box/Ctn | List Price RM/set | Offer Price RM/set |
|--------------|---|------------|---------|-------------------|--------------------|
| 95-094-1 | 6, 8, 9, 10, 11, 12, 13, 14, 15, 17, 19, 22mm | 3600 | 1/10 | 270.30 | |



117 Piece Wrench Merchandiser Set

| Product Code | Contents | Weight (g) | Box/Ctn | List Price RM/set | Offer Price RM/set |
|--------------|--|------------|---------|-------------------|--------------------|
| 89-897A | 6pcs "Slimline" combination wrench: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19mm 4pcs "Slimline" combination wrench: 21, 22, 24, 27, 25, 26, 30, 32mm Merchandiser Board | | | 3,880.90 | |



6pc Combination wrench set (Jumbo)

50651S



Part no.

755 1.1.4...1.5.8

Content:

6-Combination wrench (SAE)

1-1/4"; 1-5/16"; 1-3/8"; 1-7/16";

1-1/2"; 1-5/8".

7pc Hex long key set

5076L



NEW

Part no.

764 015L...06L

Contents:

7-Hex long key

1.5; 2; 2.5; 3; 4; 5; 6mm



100/12/13/1'






120g

Yato - Combination Spanner



7pc Hex extra long key set (MM)



| 5072XL |  |  |  |
|----------------------|---|--|---|
| Part no. | Tip | 40/18.2/19.2/1.1' | 450g |
| 764 025XL... 10XL | Content: 7-Hex extra long key 2.5; 3; 4; 5; 6; 8; 10 mm | | |

7pc Hex extra long key set (SAE)



| 5072XLS |  |  |  |
|------------------------|---|--|---|
| Part no. | Tip | 40/17.5/18.5/1.1' | 450g |
| 764 3.32XL... 3.8XL | Content: 7-Hex extra long key 3/32"; 1/8"; 5/32"; 3/16"; 1/4"; 5/16"; 3/8" | | |



11pc Double open end wrench set (MM)

| 5112 |  |  |
|-----------------|---|---|
| Part no. | 10/19.4/20.4/1.2' | 1940g |
| 754 0607...2427 | Content: 11-Double open end wrench 6x7; 8x9; 10x11; 12x13; 14x15; 16x17; 18x19; 20x22; 21x23; 23x26; 24x27 mm | |

11pc Double open end wrench set(SAE)

| 5112S |  |  |
|----------------------|---|---|
| Part no. | 10/20.0/21.0/1.2' | 2000g |
| 7540608S... 2932S | Content: 11-Double open end wrench 1/4"x5/16"; 5/16"x3/8"; 3/8"x7/16"; 1/2"x9/16"; 9/16"x5/8"; 5/8"x11/16"; 11/16"x3/4"; 13/16"x7/8"; 15/16"x1-1/16"; 1"x1-1/8"; 1-1/8"x1-1/4" | |

EA

20" Chain wrench

61914

• 20" chain



20/20.0/21.0/0.78'



1kg

1/2" 6pt. Flank impact socket

44545



| | Size | Length | Weight |  |
|----------|------|--------|--------|---|
| Part no. | | mm | g | pc/box |
| 44545 | 45 | 57 | 539 | 10 |

Diagonal pliers

612B200



| | Length | Packing | Weight |
|----------|--------|-------------------|--------|
| Part no. | mm | Q'ty/N.W/G.W/CUFT | g |
| 612B200 | 200-8" | 60/20.9/21.9/2' | 290 |

TRAGBARE BUTANE-KOCHER




Portable butane cooker, camping stove gas cooker in suitcase.

Properties: This gas stove is made of high quality sheet iron, which is durable and long life. Piezo electronic ignition aluminum burner head with windscreen.



PALLET TRUCK

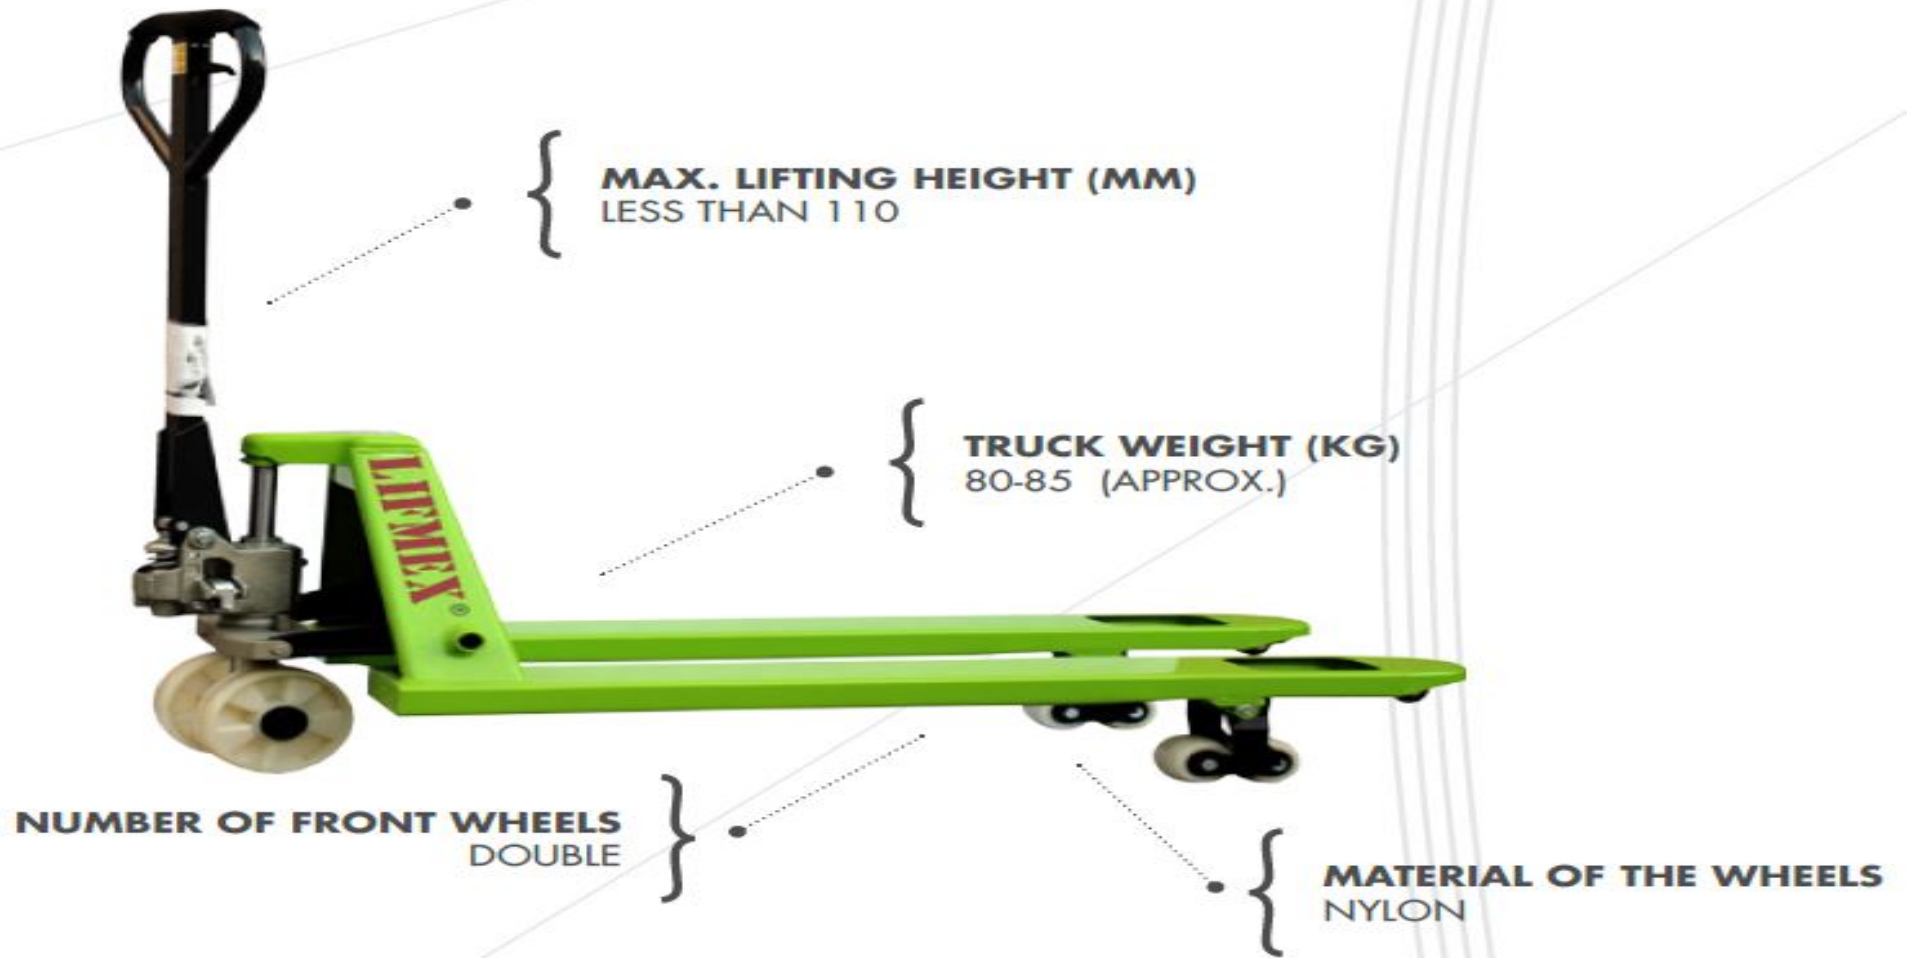

EAK

2 TON HYDRAULIC TROLLEY JACK LIFT HYDRAULIC HAND TRUCK




EAK

3 TON HYDRAULIC TROLLEY JACK LIFT HYDRAULIC HAND TRUCK





HYDRAULIC HAND STACKER

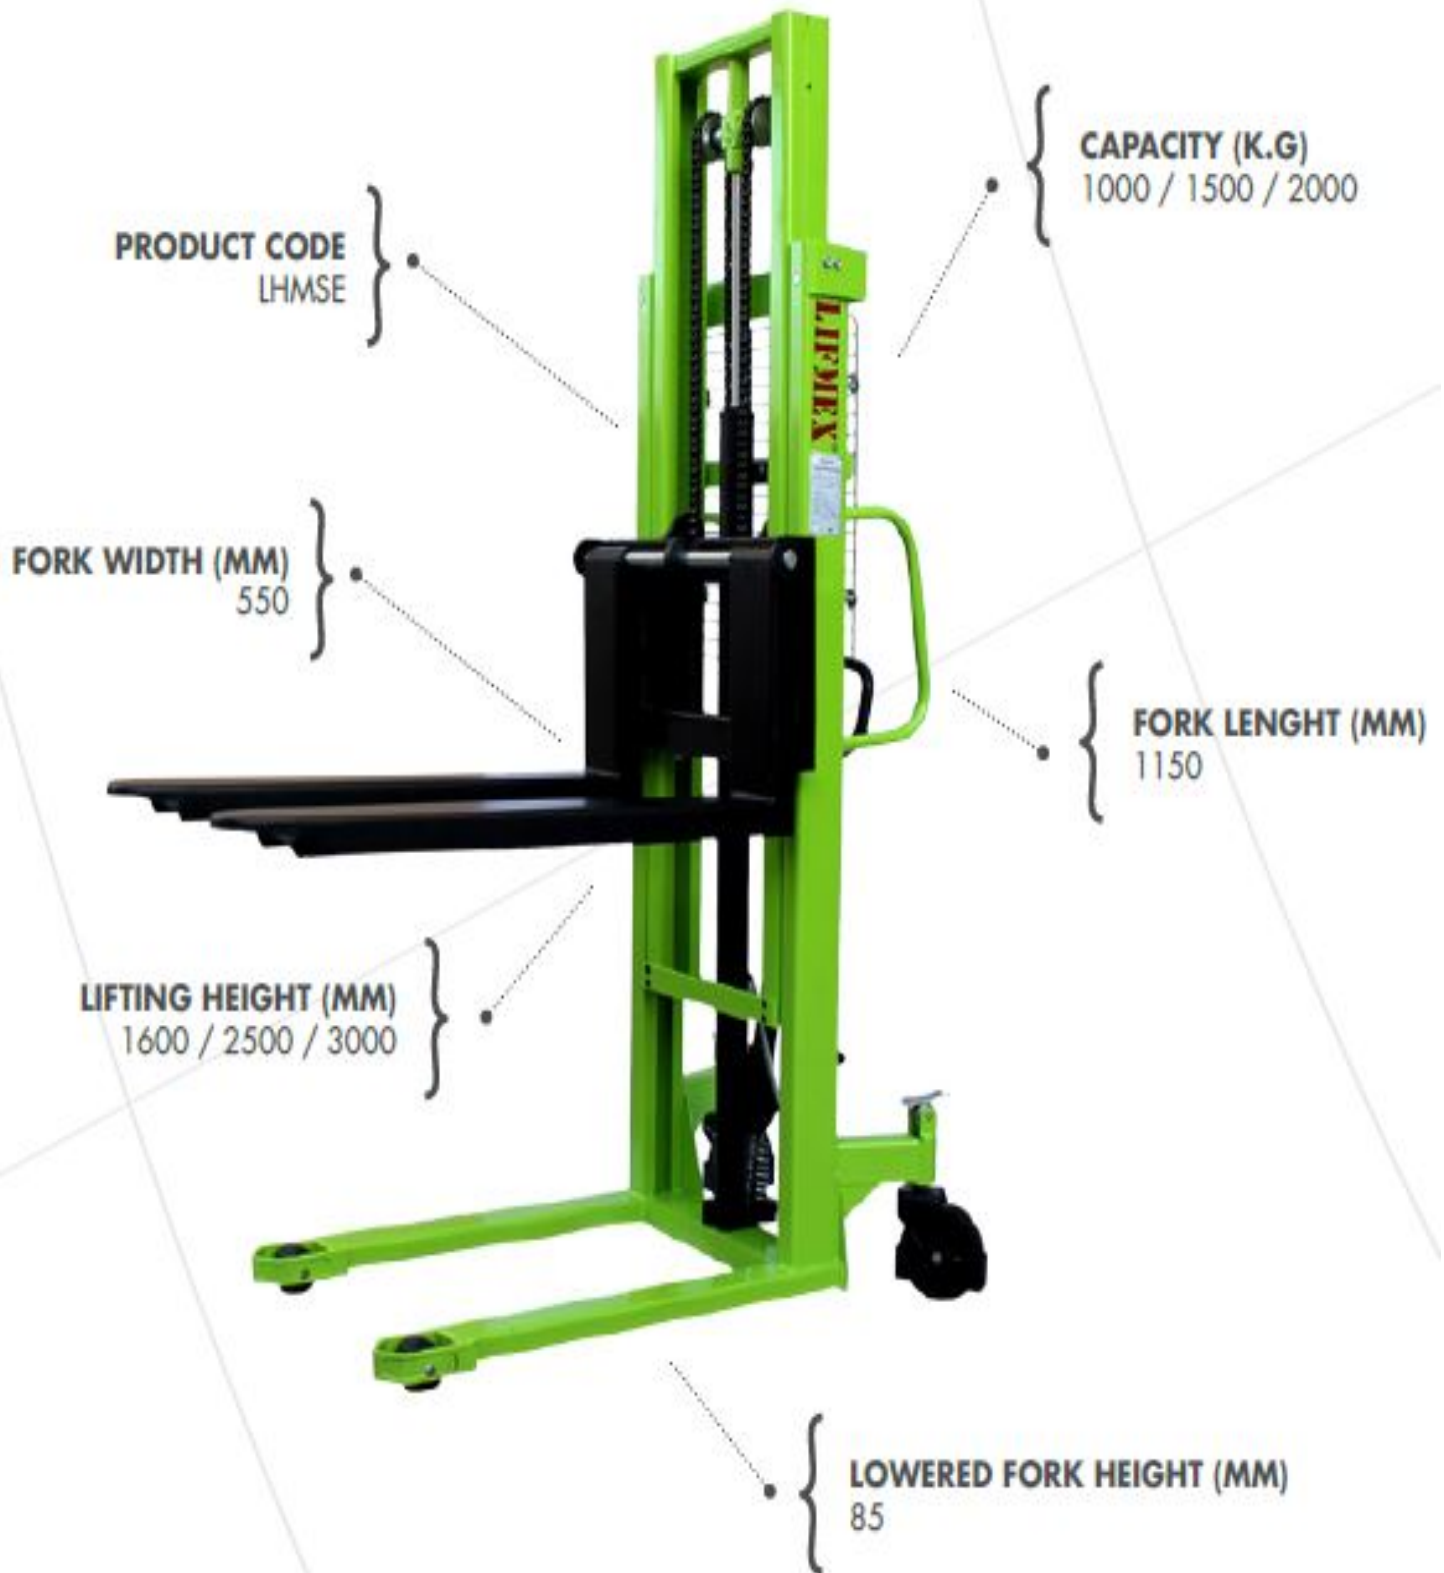

FAK

**HAND PALLET STACKER 1
TON 1.6 M MANUAL
FORKLIFT MANUAL PALLET
STACKER**

1 TON 1.6M




EAK

**ELECTRIC
PALLET LIFT
1.6M 2 TON**



HYDRAULIC SCISSOR LIFT TABLE

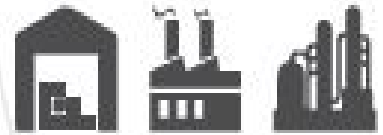

HANDLE HEIGHT (MM)
980



EAK



EAK

2 TON HYDRAULIC ENGINE HOIST







EAK



5kw Air Cooled Diesel Inverter Generator Silent Small Generator.



EAK




Self-tightening clamp

9M1602



- * Self-tightening clamp; grips tighter as it is pulled.
- * Compact and lightweight for pulling from many places.
- * Minimum of 1-1/2" reach-around for flanges, cowls, pinch welds, and lips.
- * Butts against panels where only narrow bite available.
- * 1-1/4" (31.8mm) jaws give added grip.
- * Capacity: 6 ton



 8/18.0/19.0/0.56'

 2250g

Self-tightening clamp

9M1601



- * Minimum size, maximum capability for tight places.
- * Responsive, spring-loaded, one-handed application for fast action pulls.
- * Round wedge allows chain to be pulled free of twists.
- * Aggressive cross-hatched tooth design.
- * Capacity: 5 ton

 15/16.5/17.5/0.59'

 1100g

Steel creeper

9U0311



- Six wheels make the movements easily.
- The pillow is removable and replaceable.
- Size: 93×50×12 cm



1/8.0/9.0/1.8'



8kg

SET NO. J54210 - 1/2" DRIVE 22 PC. METRIC SOCKET SET - 12 POINT


- Proto® 12 Point Sockets are ideal for use on stubborn or damaged fasteners, and also on fasteners made from soft materials.
- The TorquePlus™ design is a high performance drive configuration which allows for quick and easy socket engagement to the fastener flats, not the corners.
- The TorquePlus™ configuration employs a radius-corner design, shifting contact area and stress away from the fastener corners and distributing contact stresses over a large area of the socket, minimizing slippage.
- The TorquePlus™ internal design minimizes fastener rounding, helps to extend fastener life, and allows the user to more easily turn worn, rounded, or rusted fasteners.
- Weight: 15.21 lbs.



FAK

FORCE Professional Tools

50235

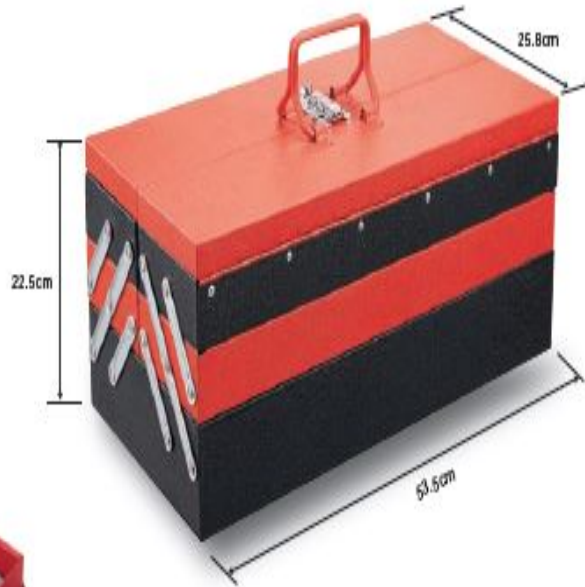

L53.5 x W25.8 x H22.5 cm
1pc/7.6kg/9.0kg/1.9'

50235-124(S&M)

1/17.97/18.94/1.9'



C5203



C5142



C21114



C3661



C5136

50235-101(MM)

1/18.9/20.9/1.9'



C5153



C5142



C21114



C4482



C5136



3/8" DRIVE FLEX-HEAD RATCHET

- 180° flex.
- 5° ratcheting angle.
- Small head design and tight swing to allow access to fastener in a tight area.



| Product ID No. | Overall Length | Weight lbs. | Repair Kit | ASME Spec. |
|----------------|----------------|-------------|------------|---------------|
| J5257F | 8-1/2" | 0.86 lbs. | J5252FRK | ASME B107.10M |

SET NO. J54128 - 1/2" DRIVE 27 PC. TOOL SET - 12 POINT

- Proto® 12 Point Sockets are ideal for use on stubborn or damaged fasteners, and also on fasteners made from soft materials.
- The TorquePlus™ design is a high performance drive configuration which allows for quick and easy socket engagement to the fastener flats, not the corners.
- The TorquePlus™ configuration employs a radius-corner design, shifting contact area and stress away from the fastener corners and distributing contact stresses over a large area of the socket, minimizing slippage.
- The TorquePlus™ internal design minimizes fastener rounding, helps to extend fastener life, and allows the user to more easily turn worn, rounded, or rusted fasteners.
- Weight: 19.09 lbs.



SET NO. J55106 - 3/4" DRIVE 42 PC. SOCKET SET - 12 & 6 POINT

- Proto® 12 and 6 Point Sockets are ideal for use on stubborn or damaged fasteners, and also on fasteners made from soft materials.
- The TorquePlus™ design is a high performance drive configuration which allows for quick and easy socket engagement to the fastener flats, not the corners.
- The TorquePlus™ configuration employs a radius-corner design, shifting contact area and stress away from the fastener corners and distributing contact stresses over a large area of the socket, minimizing slippage.
- The TorquePlus™ internal design minimizes fastener rounding, helps to extend fastener life, and allows the user to more easily turn worn, rounded, or rusted fasteners.
- Weight: 92.35 lbs



- 1/2" Surface drive socket 10; 11; 12; 13; 14; 15; 16; 17; 18; 19; 20; 21; 22; 24; 27; 30; 32 mm
- 1/2" Surface drive deep socket (77mmL) 10; 11; 12; 13; 14; 15; 17; 19; 22 mm
- 5/16" bit (30mmL): Hex 4; 5; 6; 8; 10; 12; 14 mm
- 5/16" bit (30mmL): Star T20; T25; T27; T30; T40; T45; T50; T55
- 5/16" bit (30mmL): Slotted 8; 10; 12 mm
- 5/16" bit (30mmL): Phillips PH.1; PH.2; PH.3; PH.4
- 5/16" bit (30mmL): Pozidriv PZ.1; PZ.2; PZ.3; PZ.4
- 1/2" Ratchet handle
- 1/2" Spark plug socket 16; 20.6 mm
- 1/2" Extension bar 5"; 10" (125; 250mm)
- 1/2" Universal joint
- Bit holder 1/2" DR.x5/16"
- Adaptor for extension 3/8" (F)x1/2" (M)

FAK



51010T



10pc Star tamperproof grip key set

| Part no. | 6/9.3/10.8/1.3' | 1540g |
|-------------------|---|-------|
| 767 10G... 55G | Content: 10-Star tamperproof grip key T-10H; T-15H; T-20H; T-25H; T-27H; T-30H; T-40H; T-45H; T-50H; T-55H | |

Black suitcase with 106pcs of tools

50234-107S



| Part no. | Contents: |
|----------------|--|
| 711 1N...2N | 2-Insulated Phillips screwdriver PH.1; PH.2 |
| 713 03N...065N | 4-Insulated slotted screwdriver 3; 4; 5.5; 6.5 |
| 7112S | 1-Phillips stubby screwdriver PH.2 |
| 713065S | 1-Slotted stubby screwdriver 6.5 |
| 711 1...3 | 3-Phillips screwdriver PH.1; PH.2; PH.3 |
| 6907250 | 1-Insulated water pump pliers (Curved jaw) 10" |
| 649250A | 1-Adjustable gauged wrench 250mmL |
| 6904160 | 1-Insulated long nose pliers 6" |
| 6903180 | 1-Insulated combination pliers 7" |
| 6905160 | 1-Insulated diagonal cutting pliers 6" |
| 6912160 | 1-Insulated wire stripper pliers 6" |



1/12.7/13.7/1.65'



Cam pulley lock tool

905G11



- Used on a fixed cam pulley, making replacement gears will not be so arbitrary rotation.
- Simple and fast assembly for labor-saving.
- Can use on majority part of type of cars.
- Adjust a variety of sizes to cope with different types of vehicles.



 24/23.0/24.0/1.4'  970g



Camshaft locking tool

9G1201



ECOTEC suitable for 16V 1.8/2.0 liter engines.





 36/3.24/4.24/2.6'  90g

Double open end wrench

754...




| Part no. | Size | Over | Weight |  |
|---|-------------|------|--------|---|
| | | mm | g | pc/box |
| 7541315  | 13x15 | 180 | 88.6 | 10 |
| 7541921S | 3/4"x13/16" | 236 | 196 | 5 |
| 7541922S | 3/4"x7/8" | 236 | 195 | 5 |
| 7542224S | 7/8"x15/16" | 246 | 232 | 5 |

3/4" 6pt. Flank socket

565...



| Part no. | Size | Length | Weight |  |
|----------|------|--------|--------|---|
| | | mm | g | pc/box |
| 56517 | 17 | 50 | 158 | 2 |
| 56543 | 43 | 64 | 630 | 2 |
| 56544 | 44 | 66 | 650 | 2 |

Angle and flat double spoon

68351



- Length: 510 mm
- Width: 59mm
- Head material: 1055 medium carbon steel
- Head polished: mirror polished




8/19.4/20.4/1.2'



2425g

13pc Gear ring wrench & flare nut wrench set

T51315

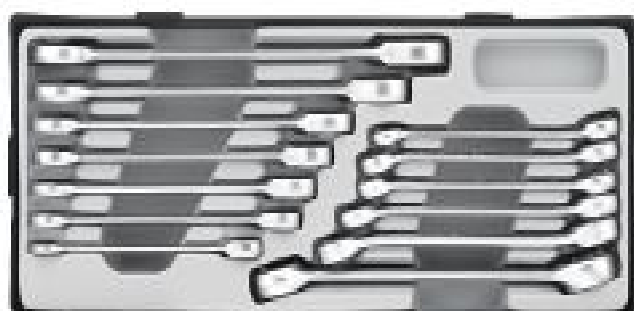

| Part no. | Contents: |
|-----------------|---|
| 757 08...19 | 7-Ring flat gear wrench 8; 10; 12; 13; 14; 17; 19 mm |
| 751 0810...1719 | 6-Flare nut wrench 8x10; 9x11; 10x12; 11x13; 12x14; 17x19mm |



6/12/13/0.78'



2000g

6pc Hex ball point grip key set

T50637



| Part no. | Contents: |
|---------------|--|
| 765 02G...08G | 6-Hex ball point grip key 2; 3; 4; 5; 6; 8 mm |



6/3.8/4.8/0.65'



626g

Insulated diagonal cutting pliers

6905180



| Part no. | Length | Packing | Weight |
|----------|--------|---------------------|--------|
| | mm | Q'ty/N.W./G.W./CUFT | g |
| 6905180 | 180-7" | 60/17/18/1.1' | 282 |

Mini diagonal pliers

612140

NEW



| Part no. | Length | Packing | Weight |
|----------|--------|---------------------|--------|
| | mm | Q'ty/N.W./G.W./CUFT | g |
| 612140 | 118 | 120/9.2/10.2/2' | 77 |

Mini nose pliers

610110

NEW






| Part no. | Length | Packing | Weight |
|----------|--------|---------------------|--------|
| | mm | Q'ty/N.W./G.W./CUFT | g |
| 610110 | 140 | 120/9.6/10.6/2.4' | 80 |

■ Oil filter master pliers


639230



| | Size |  | <i>l</i> |  |
|----------|----------|---|----------|---|
| Part no. | mm | Packing | mm | g |
| 639230 | 53-118mm | 40/19.5/20.5/1.7" | 230 | 480 |



STRAIGHT JAW LOCKING PLIERS

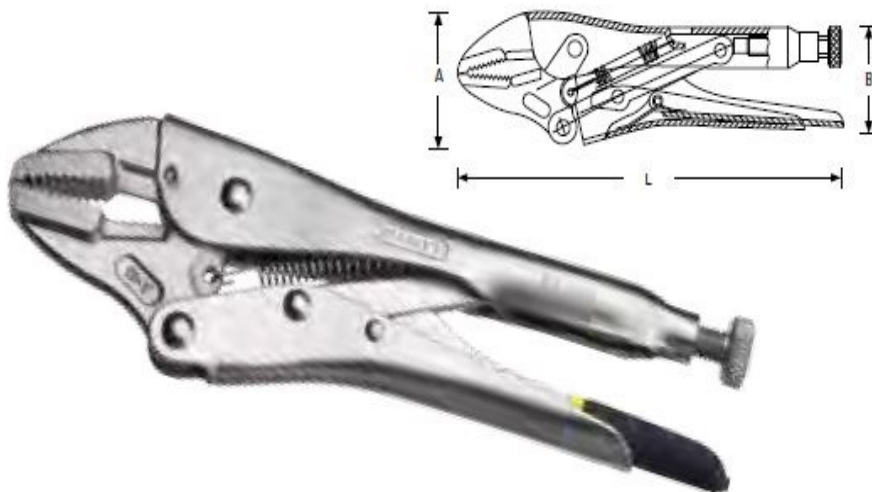

- Chrome plating is corrosion resistant
- Forged and machined jaws for maximum durability
- Screws adjust the jaws and the clamping pressure amount for precision
- Safety and ease when opening


TIN SNIPS




- Cuts up to 20 gauge (0.91mm) cold-rolled steel or 23 gauge (0.72mm) stainless-steel
- Durable fully-polished steel blades are forged to stay sharp for long cutting life
- Adjustment-free fastener prevents loosening of the blades
- Slip-resistant double cushion grip for comfort
- Meets or exceeds ANSI standards




DYNAGRIP™ LONG NOSE PLIERS

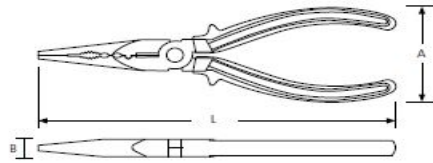

- Forged carbon steel jaws fully heat treated for optimum performance and durability
- Induction hardened cutting edges for greater reliability in cutting
- Bi-material soft grip handle provides excellent comfort
- Ergonomically designed DYNAGRIP™ handle with finger guards for better efficiency and handling

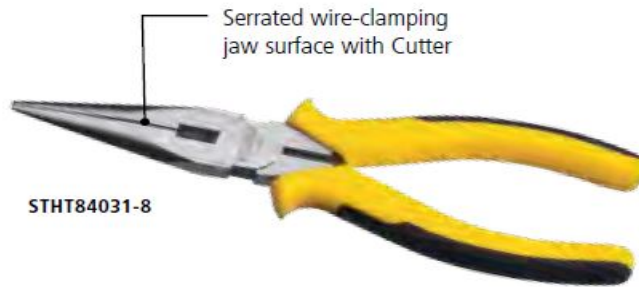


BASIC DIAGONAL CUTTING PLIERS

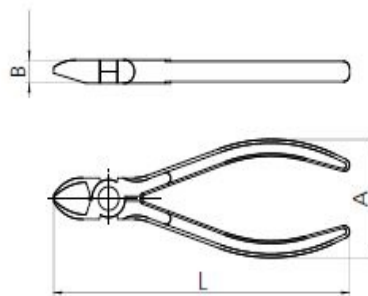

- Forged carbon steel jaws fully heat treated for optimum performance and durability
- Double dipped handle allows for a comfortable grip
- Drop-forged steel is strong and durable
- Meets ANSI specifications




DYNAGRIP™ SLIP JOINT PLIERS

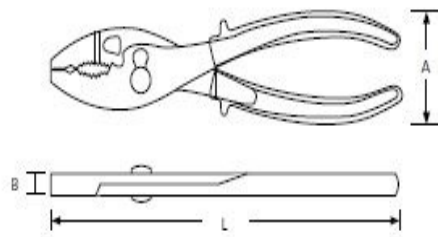

- Forged carbon steel jaws fully heat treated for optimum performance and durability
- Bi-material soft grip handle provides excellent comfort
- Ergonomically designed DYNAGRIP™ handle with finger guards for better efficiency and handling




DYNAGRIP™ FLAT NOSE PLIERS

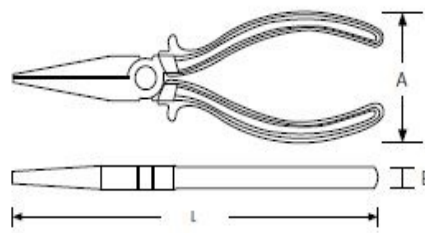

- Forged carbon steel jaws fully heat treated for optimum performance and durability
- Bi-material soft grip handle provides excellent comfort
- Ergonomically designed DYNAGRIP™ handle with finger guards for better efficiency and handling



DYNAGRIP™ END NIPPER PLIERS

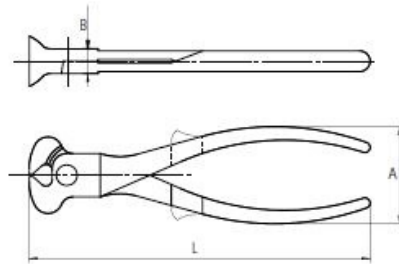

- Forged carbon steel jaws fully heat treated for optimum performance and durability
- Induction hardened cutting edges for greater reliability in cutting
- Bi-material soft grip handle provides excellent comfort
- Ergonomically designed DYNAGRIP™ handle with finger guards for better efficiency and handling



TIN SNIPS






- Cuts up to 20 gauge (0.91mm) cold-rolled steel or 23 gauge (0.72mm) stainless-steel
- Durable fully-polished steel blades are forged to stay sharp for long cutting life
- Adjustment-free fastener prevents loosening of the blades
- Slip-resistant double cushion grip for comfort
- Meets or exceeds ANSI standards

Oil filter master pliers

639230



| | Size |  | <i>l</i> |  |
|----------|----------|---|----------|---|
| Part no. | mm | Packing | mm | g |
| 639230 | 53-118mm | 40/19.5/20.5/1.7' | 230 | 480 |



Mini diagonal pliers


612140

NEW



| Part no. | Length | Packing | Weight |
|----------|--------|---------------------|--------|
| | mm | Q'ty/N.W./G.W./CUFT | g |
| 612140 | 118 | 120/9.2/10.2/2' | 77 |

CURVED JAW LOCKING PLIERS

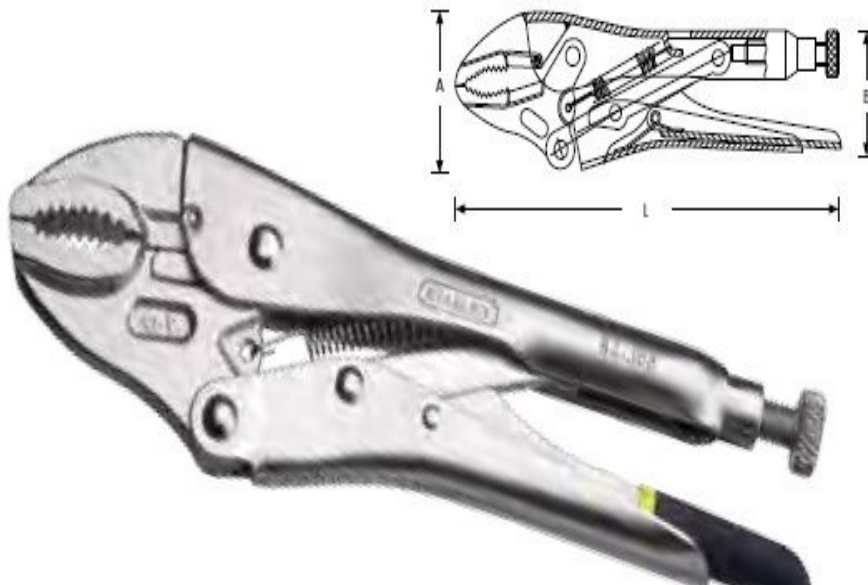

- Chrome plating is corrosion resistant
- Forged and machined jaws for maximum durability
- Screws adjust the jaws and the clamping pressure amount for precision
- Safety and ease when opening

Mini nose pliers

610110

NEW



| Part no. | Length | Packing | Weight |
|----------|--------|---------------------|--------|
| | mm | Q'ty/N.W./G.W./CUFT | g |
| 610110 | 140 | 120/9.6/10.6/2.4' | 80 |

CHIPPING HAMMER

One point end and one chisel end with spring handle to prevent kickback..



Hoist YATO YT-0661


DESCRIPTION

YATO YT-0661 lifting
telescopic telescopic, weight 2.0 kg
Capture magnetic telescopic YT-0661
Adjustable length from 250 to 750 mm
Lifting weight 2.0 kg



FAK

FORCE

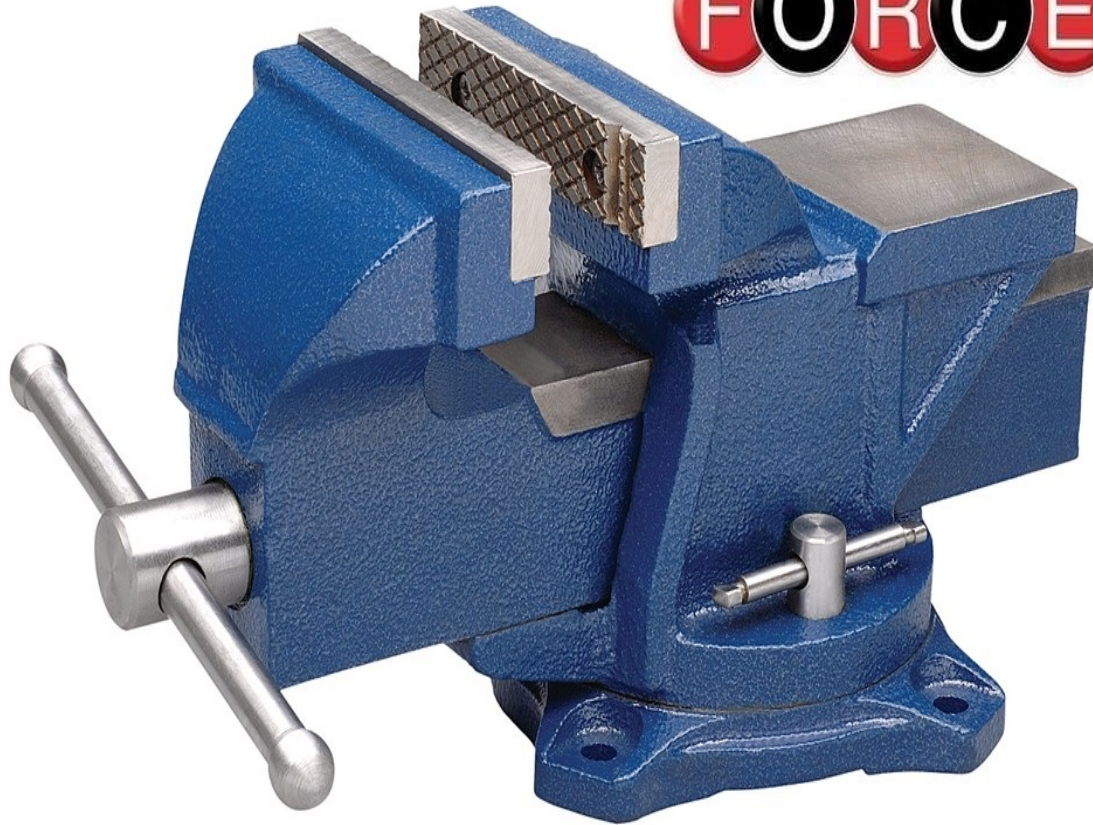

Swivel base bench vice



GLOBAL TAPE YELLOW BLADE TAPE RULES



- High-impact ABS case for durability
- Matt finish coating provides anti-glare readings
- Corrosion-resistant Tru-zero end hook for accurate measurements



TYLON™ TAPE RULES



- Tylon coated blade provides anti-glare readings
- Soft touch case
- Tru-Zero® hook for accurate internal and external measurements



OPEN REEL FIBERGLASS BLADE LONG TAPE RULES



- Double sided blade graphics for an easy read
- Corrosion-resistant Tru-zero folding end hook for accurate measurements
- Grip handle for comfortable portage



| SKU # | Description | Blade length | Blade Width | Blade Material | Accuracy | Blade Print | Blade Color | Box Qty |
|-------------|---------------------------|--------------|-------------|----------------|--------------|-------------|-------------|---------|
| STHT34791-8 | 30m/100' Metric/Imperial | 30m/100' | 1/2" | Fiberglass | II (Metric) | 2-sided | Yellow | 2 |
| STHT34794-8 | 60m/200' Metric/Imperial | 60m/200' | 1/2" | Fiberglass | II (Metric) | 2-sided | Yellow | 2 |
| 34-777 | 100m/300' Metric/Imperial | 100m/300' | 1/2" | Fiberglass | III (Metric) | 2-sided | Yellow | 2 |

FIBERGLASS BLADE LONG TAPE RULES



- High-impact case for durability
- Reinforced fiberglass blade for accurate measurements
- High visibility case make it easy to detect on the job



STEEL BLADE LONG TAPE RULES



- Polymer coated blade withstands abrasion
- Easy-wind drum for efficient retraction
- Belt clip for hands-free usage and convenient transportation



TOUGH CASE TAPE RULES

NEW
STANLEY TOUGH CASE
5m/16'



- High visibility yellow blade
- Bi-material case provide comfortable, anti-slip grip
- Triangle shape offers improved stability
- Ergonomic 45° tilt clip for easy belt hook-on



Measuring tape 100M

5096P8100



| Part no. | Size m |
|-----------|-----------|
| 5096P8100 | 100 |



10/15/17/2.6'



1306g

Measuring tape

5096A8...



NEW

| Part no. | Size | Weight | Packing |
|----------|------|--------|---------------------|
| | | g | Q'ty/N.W./G.W./CUFT |
| 5096A815 | 15 | 257 | 30/8/9/2.2' |
| 5096A830 | 30 | 425 | 30/13/14/2.2' |
| 5096A850 | 50 | 900 | 20/18/19/2.8' |

Tape Measures

Compact, quick return tapes with blade lock for accurate measurement

| Part No. | Description | ex vat |
|----------|-------------|--------|
| HN00003 | 5M Tape | £4.55 |
| HN00004 | 8M Tape | £7.55 |



Auto-stop measuring tape

5096A8...



| Part no. | Specification | Packing |
|----------|---------------|---------------------|
| | | Q'ty/N.W./G.W./CUFT |
| 5096A803 | 3m | 48/6.2/7.2/2.35' |
| 5096A805 | 5m | 48/12/14.5/2.35' |
| 5096A808 | 8m | 48/23/23.5/2.35' |




STANLEY®

CLASSIC BOX-BEAM LEVEL

The **STANLEY®** CLASSIC BOX-BEAM features a wide range of levels that come in various sizes. New features offer better visibility, readability, durability and accuracy.

SOFT MATERIAL
used to make shock-absorbing end caps

EXCELLENT ACCURACY
center vial with 0.05mm/1m
2 PLUMB VIALS
for easy readability

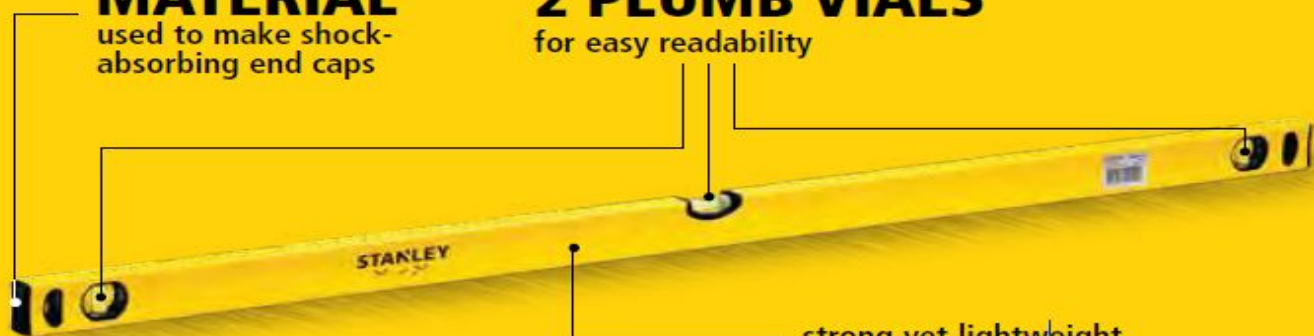

strong yet lightweight
ALUMINUM FRAME
suitable for all-purpose durability

MILLING SURFACE
to provide better accurate measurement



USER TIPS

- The hang-hole allows for easy storage
- Measuring can be done from either direction, offering excellent accuracy

STANLEY® LEVELS

Box Beam Levels

- Center block vial for durability and accuracy of 0.0005"/in
- Large, 12mm plumb tubular vials for accuracy of 0.001"/in
- MaxEdge™ bridged center vial for continuous marking edge and durability
- Shock absorbing end caps for durability and long life



| SKU # | TYPE | MAGNETIC | HAND GRIPS | LENGTH | | BOX QTY | CTN QTY | UPC |
|-----------|----------|----------|------------|--------|---------|---------|---------|--------------|
| STHT42496 | Box Beam | N | 1 | 24 in | 610 mm | — | 3 | 076174424966 |
| STHT42497 | Box Beam | Y | 1 | 24 in | 610 mm | — | 3 | 076174424973 |
| STHT42504 | Box Beam | N | 2 | 48 in | 1219 mm | — | 3 | 076174425048 |
| STHT42505 | Box Beam | Y | 2 | 48 in | 1219 mm | — | 3 | 076174425055 |
| STHT42507 | Box Beam | N | 1 | 36 in | 90 cm | — | 3 | 076174425079 |
| STHT42508 | Box Beam | Y | 1 | 36 in | 90 cm | — | 3 | 076174425086 |
| STHT42506 | Box Beam | N | 2 | 72 in | 180 cm | — | 3 | 076174425062 |



Combination Square

- Die-cast metal handle with brass hardware for durability
- Etched stainless steel blades for corrosion resistance
- Built-in scribe for easy surface marking

| SKU # | TYPE | LENGTH | | WIDTH | | GRADUATION | BOX QTY | CTN QTY | UPC |
|--------|---------|--------|--------|-------|-------|--------------------|---------|---------|--------------|
| 46-131 | English | 16 in | 406 mm | 1 in | 25 mm | 1/32", 1/16", 1/8" | — | 3 | 076174463231 |
| 46-123 | English | 12 in | 305 mm | 1in | 25 mm | 1/32", 1/16", 1/8" | — | 3 | 076174461237 |

12" Combination Square

- Die-cast metal handle for durability
- Embossed hard chrome blade is coated for corrosion resistance
- 360° vial for visibility



STANLEY® STEEL CARPENTER SQUARE



- Tempered steel designed for durability
- Deep graduations for easy reading on face and back
- Surface protected with a clear finish that resists rust
- Reverse reading scale makes measuring more efficient

TRY SQUARE ZINC HANDLE

- Metric / Imperial marking on ruler
- Cast zinc handle



| SKU | BLADE | HANDLE |
|---------|-------------|----------------|
| E-46530 | 150mm - 6" | 124mm - 4-7/8" |
| E-46532 | 200mm - 8" | 124mm - 4-7/8" |
| E-46534 | 250mm - 10" | 184mm - 7-1/4" |
| E-46536 | 300mm - 12" | 184mm - 7-1/4" |

FAK

DLR130K Laser Distance Measurer



INTERIOR **130ft.**

- ▶ Measures distance up to 130 ft. with up to 1/16" accuracy
- ▶ Four Measurement Modes—Length, area, volume and continuous for maximum versatility
- ▶ Two Measuring Reference Points—Front and back
- ▶ Four Measurement Systems—Inches, feet and inches, decimal feet and metric

Includes:

Hand Strap

(4) AAA Batteries

Belt Pouch



| Specifications | |
|------------------------------|---------------------|
| Accuracy (up to) | ±1/16" |
| Range (up to) | 2"–130 ft. |
| Laser Diode | Class 2, 630–670 nm |
| Measuring Time, Typical/Max. | <0.5 sec./4 sec. |
| Illuminated Display | No |
| Integrated Viewfinder | No |
| Power | (4) AAA batteries |
| Operating Temperature | 14°–122° F |
| Dimensions | 4.0"×2.3"×1.3" |
| Weight | 0.4 lbs. |

FAK

FORCE

Professional Tools

10517

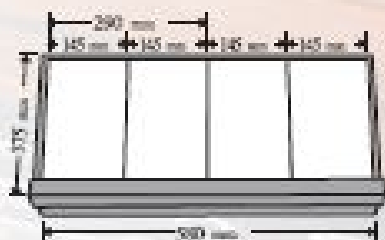

L69 x W46,5 x H98 cm



EAK



**“THE RANGE IS EQUIPPED WITH
BLADES MADE WITH HIGH QUALITY
CARBON STEEL FOR LONG LASTING
DURABILITY”**



**“ITS HIGH IMPACT
POLYMER COMPONENTS
ALSO PLAY A ROLE IN THE
TOOL'S LONGEVITY.”**

PROFESSIONAL 9MM SNAP-OFF KNIFE



- Ergonomic design of thumb pad and neck down create comfortable grip and control
- Bi-material TPR handle with soft grip or full ABS version for durability
- Fits application needs from light to heavy duty and specially designed to improve cutting performance
- Removable blade snapper in the knife cap

PROFESSIONAL INTERLOCK™ KNIFE



- Ideal for heavy duty cutting
- Metal construction for long life
- Ability to open and clean the knife
- Captive wheel lock for heavy duty clamping



CLASSIC 199® FIXED BLADE UTILITY KNIFE



- Nose overlaps at top and bottom for added strength
- Cast metal textured handle designed for long and tough use
- Works with all STANLEY® replacement utility blades

BASIC SNAP-OFF KNIFE



- Lightweight and economical snap-off blade knife
- Works with most light-weight applications
- Tips in use can be removed with the snapper at the end-cap of the knife
- Pocket clip included on the 9mm (10-131) Snap-Off Knife

RETRACTABLE UTILITY KNIFE



- Lightweight, economical utility knife
- Three-positioned retractable blade
- Interlocking overlap nose secures blade safely between knife halves



STANLEY CLASSIC 99®





- The one and only Original STANLEY®
- Interlock® nose firmly secures the blade into the knife



Aluminum pipe wrench

684...A





| |  | <i>l</i> |  |
|----------|---|----------|---|
| Part no. | packing | Length | g |
| 68410A | 24/11.0/12.0/0.4' | 250-10" | 460 |
| 68412A | 24/17.0/18.0/0.4' | 300-12" | 700 |
| 68414A | 24/21.5/22.5/0.5' | 355-14" | 895 |
| 68418A | 12/18.0/19.0/0.9' | 455-18" | 1500 |
| 68424A | 6/14.0/15.0/0.7' | 610-24" | 2330 |
| 68436A | 3/14.0/15.0/1.1' | 863-36" | 4660 |
| 68448A | 2/13.0/14.0/1.0' | 1220-48" | 6500 |

Pipe wrench

684



| |  | <i>l</i> |  |
|----------|---|----------|---|
| Part no. | packing | Length | g |
| 68408 | 36/14.0/15.0/0.4' | 200-8" | 390 |
| 68410 | 24/17.0/18.0/0.4' | 250-10" | 710 |
| 68412 | 24/23.0/24.0/0.5' | 300-12" | 960 |
| 68414 | 12/16.0/17.0/0.4' | 355-14" | 1340 |
| 68418 | 12/25.0/26.0/0.6' | 455-18" | 2090 |
| 68424 | 6/22.0/23.0/0.7' | 610-24" | 3670 |
| 68436 | 3/25.0/26.0/1.1' | 863-36" | 8340 |
| 68448 | 2/24.0/25.0/1.0' | 1220-48" | 12000 |



PIPE TOOLS - HEAVY DUTY PIPE WRENCH (CAST IRON)





| PART No. | DESCRIPTION | WT. (GM) | O/A LEN | MAX. JAW OPENING | SIZE | PBQ | SBQ | Rs. EACH |
|-----------|-------------|----------|---------|------------------|----------|-----|-----|----------|
| 87-620-23 | PIPE WRENCH | 0.225 | 140mm | 25mm | 150mm/6 | 6 | 72 | 292 |
| 87-621-23 | PIPE WRENCH | 0.38 | 186mm | 34mm | 200mm/8 | 6 | 36 | 342 |
| 87-622-23 | PIPE WRENCH | 0.81 | 248mm | 45mm | 250mm/10 | 6 | 24 | 429 |
| 87-623-23 | PIPE WRENCH | 1.41 | 297mm | 55mm | 300mm/12 | 6 | 12 | 584 |
| 87-624-23 | PIPE WRENCH | 1.4 | 332mm | 65mm | 350mm/14 | 6 | 12 | 768 |
| 87-625-23 | PIPE WRENCH | 2.38 | 414mm | 80mm | 450mm/18 | 6 | 12 | 1,110 |
| 87-626-23 | PIPE WRENCH | 3.83 | 553mm | 95mm | 600mm/24 | 2 | 8 | 1,765 |
| 87-627-23 | PIPE WRENCH | 7.88 | 805mm | 140mm | 900mm/36 | 1 | 4 | 3,342 |

Ratchet tube cutter

656



| Part no. | mm |  packing |  g |
|----------|-------|---|---|
| 65631 | 8-28 | 36/16.5/17.5/2.14 | 460 |
| 65632 | 28-67 | 12/13/13.5/0.84 | 1080 |

*Quick and easy ratchet mechanism make it easy and comfortable to use even in narrow spaces.

*Pipe thickness up to 3mm.

6 PCS CUSHION GRIP™ SCREWDRIVER SET WITH BONUS (TESTER INCLUDED)



- Phillips® PH1 x 100mm
- Phillips® PH2 x 45mm
- Phillips® PH2 x 100mm
- Slotted 5mm x 100mm
- Slotted 6.5mm x 45mm
- Slotted 6.5mm x 100mm



| SKU # | Description | Box Qty |
|-------------|--|---------|
| STHT92002-8 | 6 PCS Cushion Grip™ Screwdriver Set with Bonus (Tester included) | 12 |

6 PCS CUSHION GRIP™ SCREWDRIVER SET



- Phillips® PH1 x 100mm
- Phillips® PH2 x 150mm
- Std Parallel 5mm x 100mm
- Std Parallel 5mm x 150mm
- Slotted 6.5mm x 150mm
- Slotted 5mm x 100mm



| SKU # | Description | Box Qty |
|-------------|-------------------------------------|---------|
| STHT65242-8 | 6 PCS Cushion Grip™ Screwdriver Set | 12 |

6.3MM PHILLIPS® HEADS



- Economical double ended tips
- Ideal for screwing
- Tempered for durability

| SKU # | Description | Tip Size | Length (mm) | Box Qty |
|------------|----------------|----------|-------------|---------|
| 63-101T-23 | PH1-PH1 X 65mm | PH1-PH1 | 65 | 10 |
| 63-102T-23 | PH2-PH2 X 65mm | PH2-PH2 | 65 | 10 |
| 63-103T-23 | PH3-PH3 X 65mm | PH3-PH3 | 65 | 10 |

7 PCS VDE SCREWDRIVER SET

3.0 x 100mm
4.0 x 100mm
5.5 x 125mm
6.5 x 150mm

3.0 x 70mm

PH1 x 80mm
PH2 x 100mm




- Insulation directly injection-moulded around the blade
- Ergonomic, shock resistant, anti slip handle and for greater torque to be applied with less effort
- Each screwdriver is individually tested to 10,000V in a water bath for 10 SCEa



| SKU # | Description |
|-------------|---------------------------|
| STHT65980-8 | 7 PCS VDE Screwdriver Set |

PVC HANDLE SLOTTED FLARED

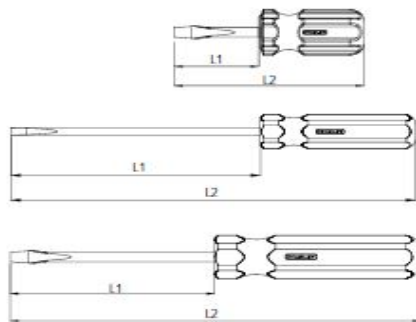

- Comfortable handle
- Chrome plated Cr-V bar resists corrosion
- Magnetic tips for secure grip on fasteners
- Color coordinated handles: red (standard), blue (Phillips®), black (Torx)







VDE SCREWDRIVER SLOTTED FLARED



- Insulation directly injection-moulded around the blade
- Ergonomic, shock resistant, anti slip handle and for greater torque to be applied with less effort
- Each screwdriver is individually tested to 10,000V in a water bath for 10 SCEa

| SKU # | Description | Tip Size | L1 (mm) | Length (mm) | Box Qty |
|-------------|-------------------------------------|----------|---------|-------------|---------|
| STHT65966-8 | VDE Screwdriver Standard 3.0x100mm | 3.0 | 100 | 200 | 12 |
| STHT65967-8 | VDE Screwdriver Standard 4.0x100mm | 4.0 | 100 | 200 | 12 |
| STHT65968-8 | VDE Screwdriver Standard 5.5x125mm | 5.5 | 125 | 235 | 12 |
| STHT65969-8 | VDE Screwdriver Standard 6.5x150mm | 6.5 | 150 | 265 | 12 |
| STHT65970-8 | VDE Screwdriver Standard 8.0x175mm | 8.0 | 175 | 300 | 12 |
| STHT65971-8 | VDE Screwdriver Standard 10.0x200mm | 10 | 200 | 325 | 12 |



CUSHION GRIP™ PHILLIPS®



- Bi-material (PP+TPR) soft grip handle providing excellent comfort
- Chrome Vanadium (Cr-V) blade for durability
- Magnetic tips for easy pick up and screw locator
- Three-sided handle allowing more torque with anti-slip and anti rolling features reducing handle slippage
- Ergonomic design with finger point in neck-down area for precise control
- Built-in hang hole for easy storage
- Screw tip identification on the handle for organization



CUSHION GRIP™ SLOTTED FLARED



- Bi-material (PP+TPR) soft grip handle providing excellent comfort
- Chrome Vanadium (Cr-V) blade for durability
- Magnetic tips for easy pick up and screw locator
- Three-sided handle allowing more torque with anti-slip and anti rolling features reducing handle slippage
- Ergonomic design with finger point in neck-down area for precise control
- Built-in hang hole for easy storage
- Screw tip identification on the handle for organization



1Pcs Car Lift Hydraulic Jack Automotive Lifter Vehicle Bottle Jack Repair Tool 2T / 3T / 5T Capacity Optional

Description:

with proper and regular maintenance, this hydraulic jack can be used for a long time without leaking. turning screw up when height is not enough. use the right, not edge-up or upside-down.

characteristics:

- enlarged base ensures stable and safe use.
- oil return valves operation is simple, convenient and fast.
- whole body casting, thickened steel plate.
- use for a long time and do not leak.
- skidding lines on the top

Specifications:

Max Lifting Capacity: 2 T

Min Height: $\leq 148\text{mm}$ / 5.82 "

Lifting Height: $\geq 80\text{mm}$ / 3.14"

pass Height: $\geq 50\text{mm}$ / 1.96 "

weight: 1.96 kg (approximately)

Max Lifting Capacity: 3 T

Min Height: $\leq 180\text{mm}$ / 7.08 "

Lifting Height: $\geq 100\text{mm}$ / 3.93"

pass Height: $\geq 50\text{mm}$ / 1.96 "

weight: 2.61 kg (approximately)

Max Lifting Capacity: 5 T

Min Height: $\leq 185\text{mm}$ / 7.28 "

Lifting Height: $\geq 110\text{mm}$ / 4.33"

pass Height: $\geq 60\text{mm}$ / 2.36 "

weight: 3.44 kg (approximately)



Jack stands

9U39...



- These models incorporate a lever and ratchet assembly for adjusting the height.
- Same as Model 9U3902 but these models are newly designed with rubber pads which can prevent the auto body from damage.

| Part No. | Capacity (ton) | Height range (mm) | Base Size (mm) | Packing | g |
|----------|----------------|-------------------|----------------|-----------------|------|
| 9U3901 | 3 ton | 270-420 | 177 x 194 | 1/6.0/6.6/0.66' | 6000 |
| 9U3902 | 3 ton | 290-440 | 177 x 194 | 1/6.6/7.2/0.66' | 6600 |



SPECIFICATIONS

| | |
|------------------------|---------------|
| Brand | Aton |
| Hand tools Type | Hand Jacks |
| Item EAN | 2724304893271 |


DESCRIPTION:

PRODUCT FEATURES :

- Collapsible handle for easy storage, operation and maintenance
- Top quality steel structure makes high safety and durability
- Fast lift speed makes it work more sufficiently
- Sensitive brake system, safe and reliable
- All jacks are tested with 25% overload
- Equipped with fixed claw
- Size : 5 T
- Color : Blue
- Model Number : 302105
- Dimensions : 610 x 130 x 90mm



EAK

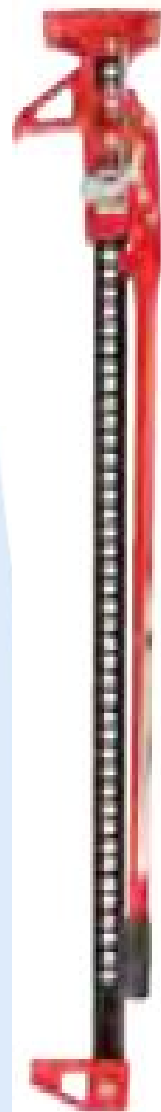

1200mm Off Road Jack

154 - 1070mm height, 3 ton maximum load, 14kg weight
TOOT2808

1500mm Off Road Jack

154mm - 1350mm height, 3 ton maximum load, 15kg weight
TOOT2809




FAK



RBU = Shank mounted wheel brushes, crimped

| | | |
|-----------------------------|--------|----|
| POS RBU 3006/6 ST 0,20 | 531808 | 28 |
| POS RBU 5015/6 ST 0,20 | 531822 | 28 |
| POS RBU 7015/6 ST 0,30 | 894606 | 28 |
| POS RBU 10010/6 ST 0,30 | 894613 | 28 |
| POS RBU 3006/6 INOX 0,20 | 531884 | 28 |
| POS RBU 5015/6 INOX 0,20 | 531891 | 28 |
| POS RBU 7015/6 INOX 0,30 | 894620 | 28 |
| POS RBU 10010/6 INOX 0,30 | 894637 | 28 |
| POS RBU 5015/6 SiC 180 0,90 | 531945 | 28 |
| POS RBU 7015/6 SiC 180 0,90 | 894644 | 29 |





RBG = Shank mounted wheel brushes, knotted

| | | |
|--------------------------|--------|----|
| POS RBG 7006/6 ST 0,35 | 531969 | 29 |
| POS RBG 7006/6 ST 0,50 | 894569 | 29 |
| POS RBG 7006/6 INOX 0,35 | 531976 | 29 |
| POS RBG 7006/6 INOX 0,50 | 894576 | 29 |



TBU = Shank mounted cup brushes, crimped

| | | |
|-----------------------------|--------|----|
| POS TBU 5010/6 ST 0,30 | 532171 | 31 |
| POS TBU 5010/6 INOX 0,30 | 894651 | 31 |
| POS TBU 5010/6 SiC 180 0,90 | 894668 | 31 |



EAK



RBGIT = Wheel brushes, knotted
 RBGIT PIPE = Wheel brushes, knotted, pipeline
 CT = COMBITWIST® type



Shoe Handles,
 Narrow Face



EDP 89556

GB Steel wire brush

YATO



Palm-coated work gloves are a cost-effective alternative to leather, but they have a few more benefits. This blog looks at some of those benefits and provides glove suggestions.



Golden Welding Gloves with Piping (Heavy Duty)

I



Drilling/ Fastening



***Drywall Screwdrivers
Screwdrivers***

EAK

15pc 1/2" Impact wrench socket set

4142-9



Part no.

445 10...24

82549

8044125MPB

80541MPB

809QC

638M

Contents: 1/2"DR.

10-Impact socket

10; 11; 12; 13; 14; 17; 19; 21; 22; 24 mm

1-Impact wrench

1-Impact extension 125mmL

1-Impact universal joint

1-Quick connector (20MP)

1-Mini oiler



4/19.3/20.3/1.2'



4825g

18V COMPACT COMBI & BRUSHLESS IMPACT DRIVER KIT

DCK285M2B

DCD785 2 Speed Combi

DCF895 Brushless Impact Driver

2 x 4.0Ah Batteries

Multi-Voltage Charger

DS150 TOUGHSYSTEM™ Kit Box



LITHIUM ION

TOUGHSYSTEM™

BRUSHLESS

**18
VOLT**

**4.0
AH**

2



Also available as non-brushless version - DCK285M2

**18
VOLT**

DC927KL

**Patented 3-Speed
All-Metal Transmission**

Maximizes the speed to the application for optimal performance

Heavy-Duty 1/2" Self-Tightening Chuck

Chuck tightens throughout operation providing superior bit gripping torque

Maximum Durability and Reliability

Built to withstand the job-site environment and the most demanding applications

18V High Performance Battery Pack

Provides long run-time and battery life

DeWALT Built High Power, High Efficiency Motor with Electric Brake
Delivers maximum performance in all drilling and fastening applications

Anti-Slip Comfort Grip
Provides increased comfort and control



GSA 12 V-LI (Solo) Cordless Sabre Saw (0 601 64L 9L2)**



Capacity

| | |
|---------------|-----------------|
| Stroke speed | : 0 - 3,000 min |
| Stroke Length | : 14.5 mm |
| Pipe Diameter | : 50 mm |
| Wood | : 65 mm |

Drill

64

6413 10mm (3/8") Compact and lightweight, yet with enough power.

- Ergonomically designed handle with rubberized grip provides more control and comfort.
- Chuck capacity: 1.5-10mm (1/16"-3/8").
- In-line design brings drilling pressure in line with center of drill bit axis.
- All ball bearing construction ensures high durability.



| | |
|-------------------------|----------------------------|
| Continuous rating Input | 450W |
| Capacity | Steel : 10mm (3/8") |
| | Wood : 25mm (1") |
| No load speed (rpm) | 0-3,000 |
| Dimensions | 234 x 64 x 183mm |
| (L x W x H) | (9-1/4" x 2-1/2" x 7-1/4") |
| Net weight | 1.2kg (2.6lbs) |
| Power supply cord | 2.0m (6.6ft) |
| | |
| | |

YATO

CORDLESS DRILL - 10.8V YT 82851



Single Speed Impact Drills



New Compact Generation

Easy

Universal

Expert

The “Easy” line offers small and light-weight drills ideal for smaller projects.

Drill

64

6413 10mm (3/8") **Compact and lightweight, yet with enough power.**

- Ergonomically designed handle with rubberized grip provides more control and comfort.
- Chuck capacity: 1.5-10mm (1/16"-3/8").
- In-line design brings drilling pressure in line with center of drill bit axis.
- All ball bearing construction ensures high durability.



| | |
|---------------------------|--|
| Continuous rating Input | 450W |
| Capacity | Steel : 10mm (3/8") |
| | Wood : 25mm (1") |
| No load speed (rpm) | 0-3,000 |
| Dimensions (L x W x H) | 234 x 64 x 183mm (9-1/4" x 2-1/2" x 7-1/4") |
| Net weight | 1.2kg (2.6lbs) |
| Power supply cord | 2.0m (6.6ft) |
| | |
| | |

FAK



5" ANGLE GRINDER

9565CV

1GUA6

Variable Speed



SJS - Super Joint System Helps Prevent Gear Damage

- Electronic limiter prevents motor burnout
- Electronic speed control maintains desired speed under load
- Soft start feature for smooth start-ups
- Variable speed (2,800-10,500 RPM) to match speed to desired application; lock-on feature
- Labyrinth construction seals motor and bearings from contamination

MODEL 9565CV INCLUDES: 5" Grinding wheel (741407-B), Lock nut wrench (782412-6), Side handle (152490-4), Lock nut (193465-4), Inner flange (224378-9), Wheel guard (135108-2)

115MM & 125MM GRINDERS

| CAT. NO. | DESCRIPTION |
|---------------|---|
| D28065 | 125mm, 1250 watts with Dust Ejection System |
| DW831 | 125mm, 1400 watts |
| D28117 | 115mm, 1100 watts low vibration |



D28065

4" Angle Grinder

GWS 750-100
(0 601 394 0L0)

**HEAVY
DUTY**



1 619 P11 715



Capacity

| | |
|---------------|----------------|
| Power Input | : 750 W |
| No-load Speed | : 11,000 rpm |
| Disc Diameter | : 100 mm |
| Grip Size | : 59 / 54.5 mm |
| Perimeter | : 187 mm |
| Voltage | : 230 / 240 V |
| Frequency | : 50 / 60 Hz |
| Weight | : 1.8 kg |

230MM GRINDERS

| CAT. NO. | DESCRIPTION |
|----------------|--------------------------|
| D28415 | 2200 watts Low Vibration |
| D28490 | 2000 watts |
| D28492K | 2200 watts |



D28415

Grinding Sanding

Angle Grinder

204

GA9020 230mm (9") Outstanding durability.

- Increased heat resistance.
- Superior anti-dust structure.
- Machined bevel gear for strength.
- Soft grip for more comfort and control.
- Gear housing can be positioned at every 90 degrees.



Continuous rating Input 200W

Capacity Depressed center wheel
: 230mm (9")

Wire cup brush
: 110mm (4-3/8")

Cut-off wheel : 230mm (9")

No load speed (rpm) 6,600

Dimensions 473 x 249 x 140mm

(L x W x H) (18-5/8" x 9-3/4" x 5-1/2")

Net weight 4.7kg (10.4lbs)

Power supply cord 2.5m (8.2ft)

115MM GRINDER

D28113K

Power Input 900 watts

No Load Speed 10000 rpm

Max. Disc Diameter 115 mm

Weight 2.1 kg



Diamond Cutting / Grinding / Polishing Accessories



Sawing Accessories



System Accessories



Optiline
WOOD

Top performance in wood.
The optimum blade for cutting results and service life.



Speedline
WOOD

Fast rip and cross cuts in all types of wood.
For a fast and coarse cut.



MULTI
MATERIAL

Clean through different materials.
A circular saw blade for all applications.




CONSTRUCT
WOOD

Robust in construction site timber.
For coarse wood on construction sites. Also cuts through nails and concrete residues.

Sawing

Accessories

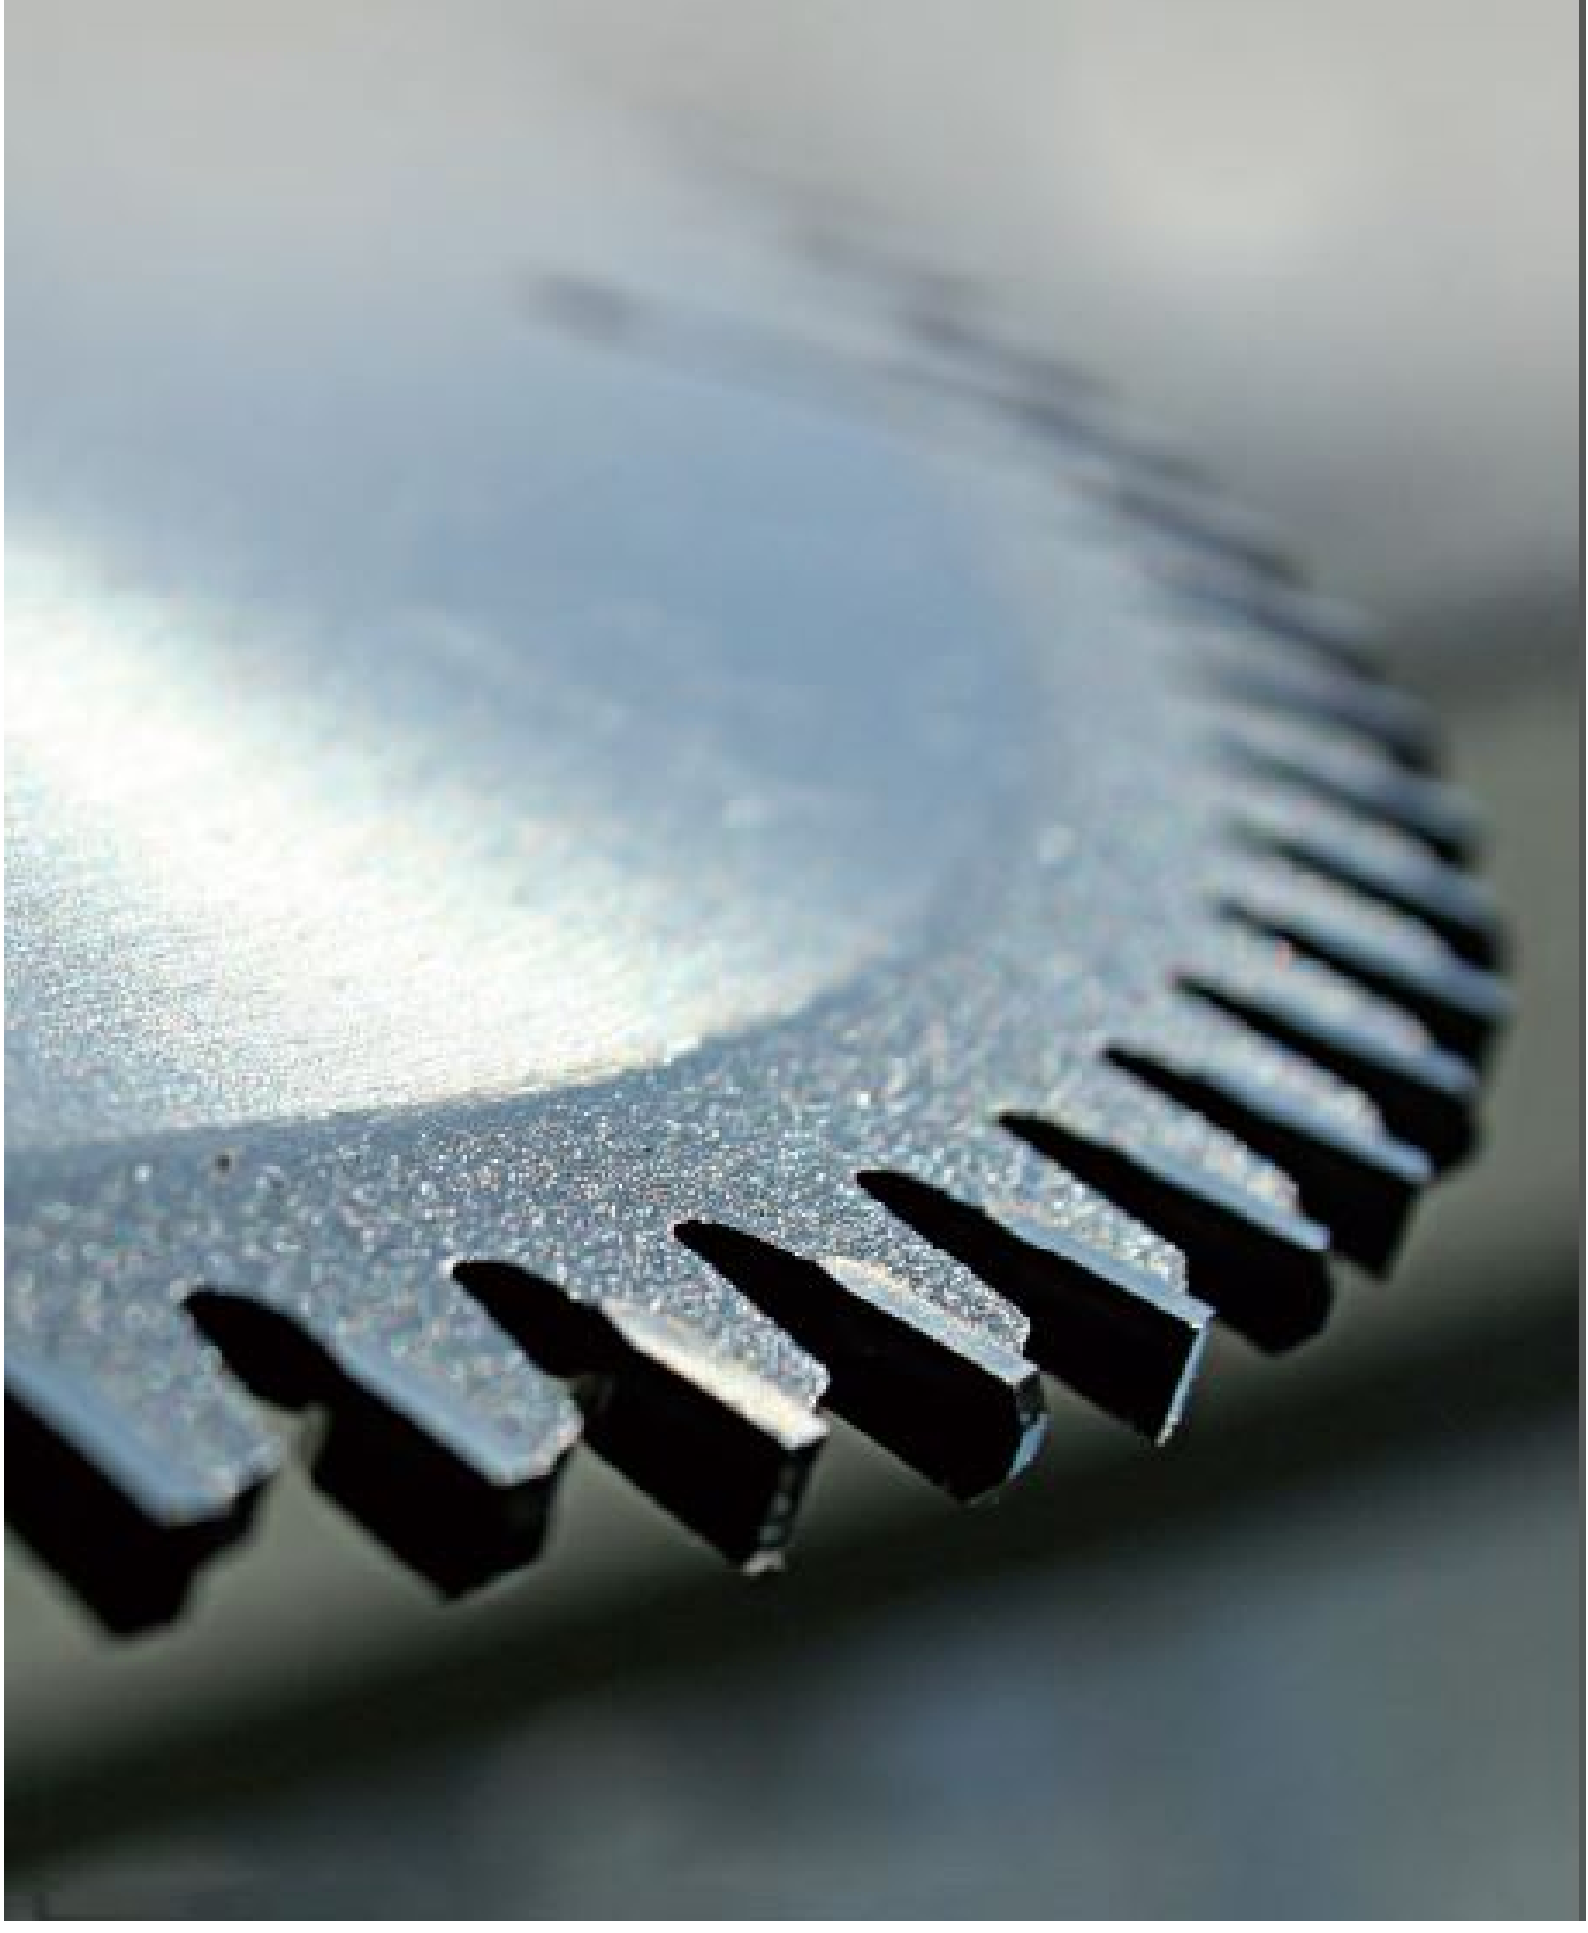

Diamond Wheels



Electro Deposited Diamond Wheel / Standard Range

Best in cutting softer materials such as Resin board, Fiberglass, pipe etc

- The protruding grit volume allows for easier cutting of marble, sand stone and limestone.
- There is no heat generated therefore the cutting of material is quicker and easier.
- Have a high grit density which gives a higher accuracy when cutting.



Segmented Type

| D | T | X | H | d | Color | For Material | For Model | Part No. |
|-----|---|---|-------|---|--------|----------------------------------|----------------|----------|
| 115 | - | - | 22.23 | - | Silver | Marble, sand stone and limestone | 115mm Grinders | D-25024 |
| 180 | - | - | 22.23 | - | Silver | Marble, sand stone and limestone | 180mm Grinders | D-25030 |

Corrugated / Mid Range

Dry


* Wet

- It will be discontinued once current stock is over



| D | T | X | H | d | Color | For Material | | | | | | | | | For Model | Part No. |
|-----|-----|-----|-------|---|-------|--------------|---|---|---|---|---|---|---|---------------------------|---------------|------------|
| | | | | | | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | | | |
| 125 | 2 | 7 | 22.23 | - | Blue | ⊗ | ⊗ | ⊗ | ⊙ | ⊙ | | | | Ideal for Ceramic Tile | 125mm Grinder | • A-80690 |
| 180 | 2 | 7 | 22.23 | A | Blue | ⊗ | ⊗ | ⊗ | ⊙ | ⊙ | | | | | 180mm Grinder | • A-80709 |
| 110 | 1.5 | 4.0 | 20 | - | Gold | ⊗ | ⊗ | ⊗ | | ⊗ | | | | - | 110mm Cutter | • *B-01214 |
| 110 | 1.5 | 6.0 | 20 | - | Gold | ⊗ | ⊗ | ⊗ | ⊗ | | | | | | 110mm Cutter | • *A-07238 |


Blade Anatomy

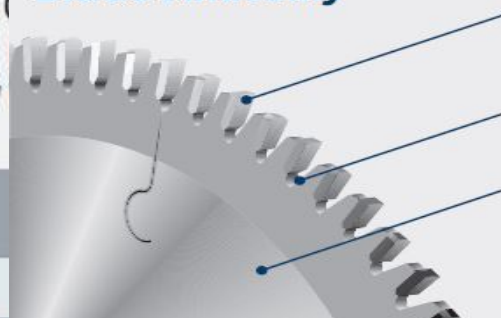

Kerf: Width of cut (also largest width of saw tooth)

Gullet: Cutaway area between teeth for efficient chip removal

Plate: Body of the blade, which supports and guides the teeth



Hook Angle: Angle of tooth relative to blade radius, which determines aggressiveness of cut and workpiece finish

| | | | | | | | | | | | | | | | | |
|-----|-----|---|-------|----|------|---|---|---|---|---|---|---|--|------------------------------|-----------------------------|-----------|
| 125 | 2 | 7 | 22.23 | 20 | Blue | ⊗ | ⊗ | ⊗ | ⊙ | ⊙ | | | | Ideal for | 125mm Grinder, 125mm Cutter | • A-02761 |
| 110 | 1.2 | 6 | 20 | - | Blue | | | ⊗ | ⊙ | ⊙ | ⊗ | ⊗ | | Ideal for Bullet proof Glass | 110mm Cutter | *B-00795 |

Professional Series Metal Cutting Blades

Cooler running, longer life, less dust and cleaner cuts than bonded abrasive wheels

Extra-hard teeth with 0° or negative hook angle provide fast, clean cuts with minimal burrs

Expansion slots allow blade to expand and contract without warping

Thick plate, hard body for accurate and true running



Diamond Wheels

Features in terms of Shape



Segmented Type:

Most commonly used. Blade has slits and a layer of diamond is sintered on the edges. Cuts faster than continuous rim type and maintains average cutting surface.



Segmented Wave Type:

This wheel has slits like the segmented wheel. Each segment has many notches (Wave). These notches ensure:

- Fast cutting with less resistance.
- Smooth debris removal.
- Less loading on wheel.



Corrugated Type:

This wheel has notches around the Rim. Has a characteristic between Continuous Rim and Segmented Type. Has faster cutting like Segmented Type. At the same time, can attain cleaner surface like continuous rim without broken edges.



Continuous Rim Type:

Has layer of diamond with uniform thickness around the entire rim. Can maintain clean surface even on crusty, brittle materials. Cuts with accuracy but not as fast as segment type wheel.



Electro deposited Type:

Diamonds are electro deposited and have more exposure than bonded type. Cuts faster and more efficient.

The Makita Diamond Wheel Series offers Three types of wheel grades to meet user needs.

Premium Range:

This yields the highest performance in both cutting speed and durability

Mid Range:

This achieves an optimum balance between performance and price.

Standard Range:

This has the attraction of a reasonable price tag.



► Max. rpm of angle grinder dependent on circumferential speed in m/s and disc diameter

► Cross bar, red = 80 m/s

Tips on application:

Blue = metal

Green = stone

Black = Inox



Sell-by date:

the disc can be used without restriction until the date stated, for example:

V01/2013 = 1st quarter of 2013

V04/2013 = 2nd quarter of 2013

V07/2013 = 3rd quarter of 2013

V10/2013 = 4th quarter of 2013

oSa symbol

Work safety

► Application restrictions

► Do not use a damaged disc

► Part number

► Manufactured in compliance with the guidelines of the EN standard 12413

► Disc dimensions - mm

► Disc dimensions - Inch

► A = Aluminium oxide (high-quality aluminium oxide) for working in metal

C = Silicon carbide (SiC) for working in stone

30 = Grinding grit mixture:

24-30 = medium coarse (dia. of the grit in accordance with FEPA-standard: G 24 = 0.6 to 1.0 mm, G 30 = 0.5 to 0.8 mm)

S = Disc hardness (DIN ISO 525):


L to O = medium, P to S = hard, T to W = very hard

BF = Bakelite (artificial resin) bonded and reinforced with fibre fabric

► Does not contain iron, chlorine and sulphur

Grinding / Cutting/ Brushing

Accessories

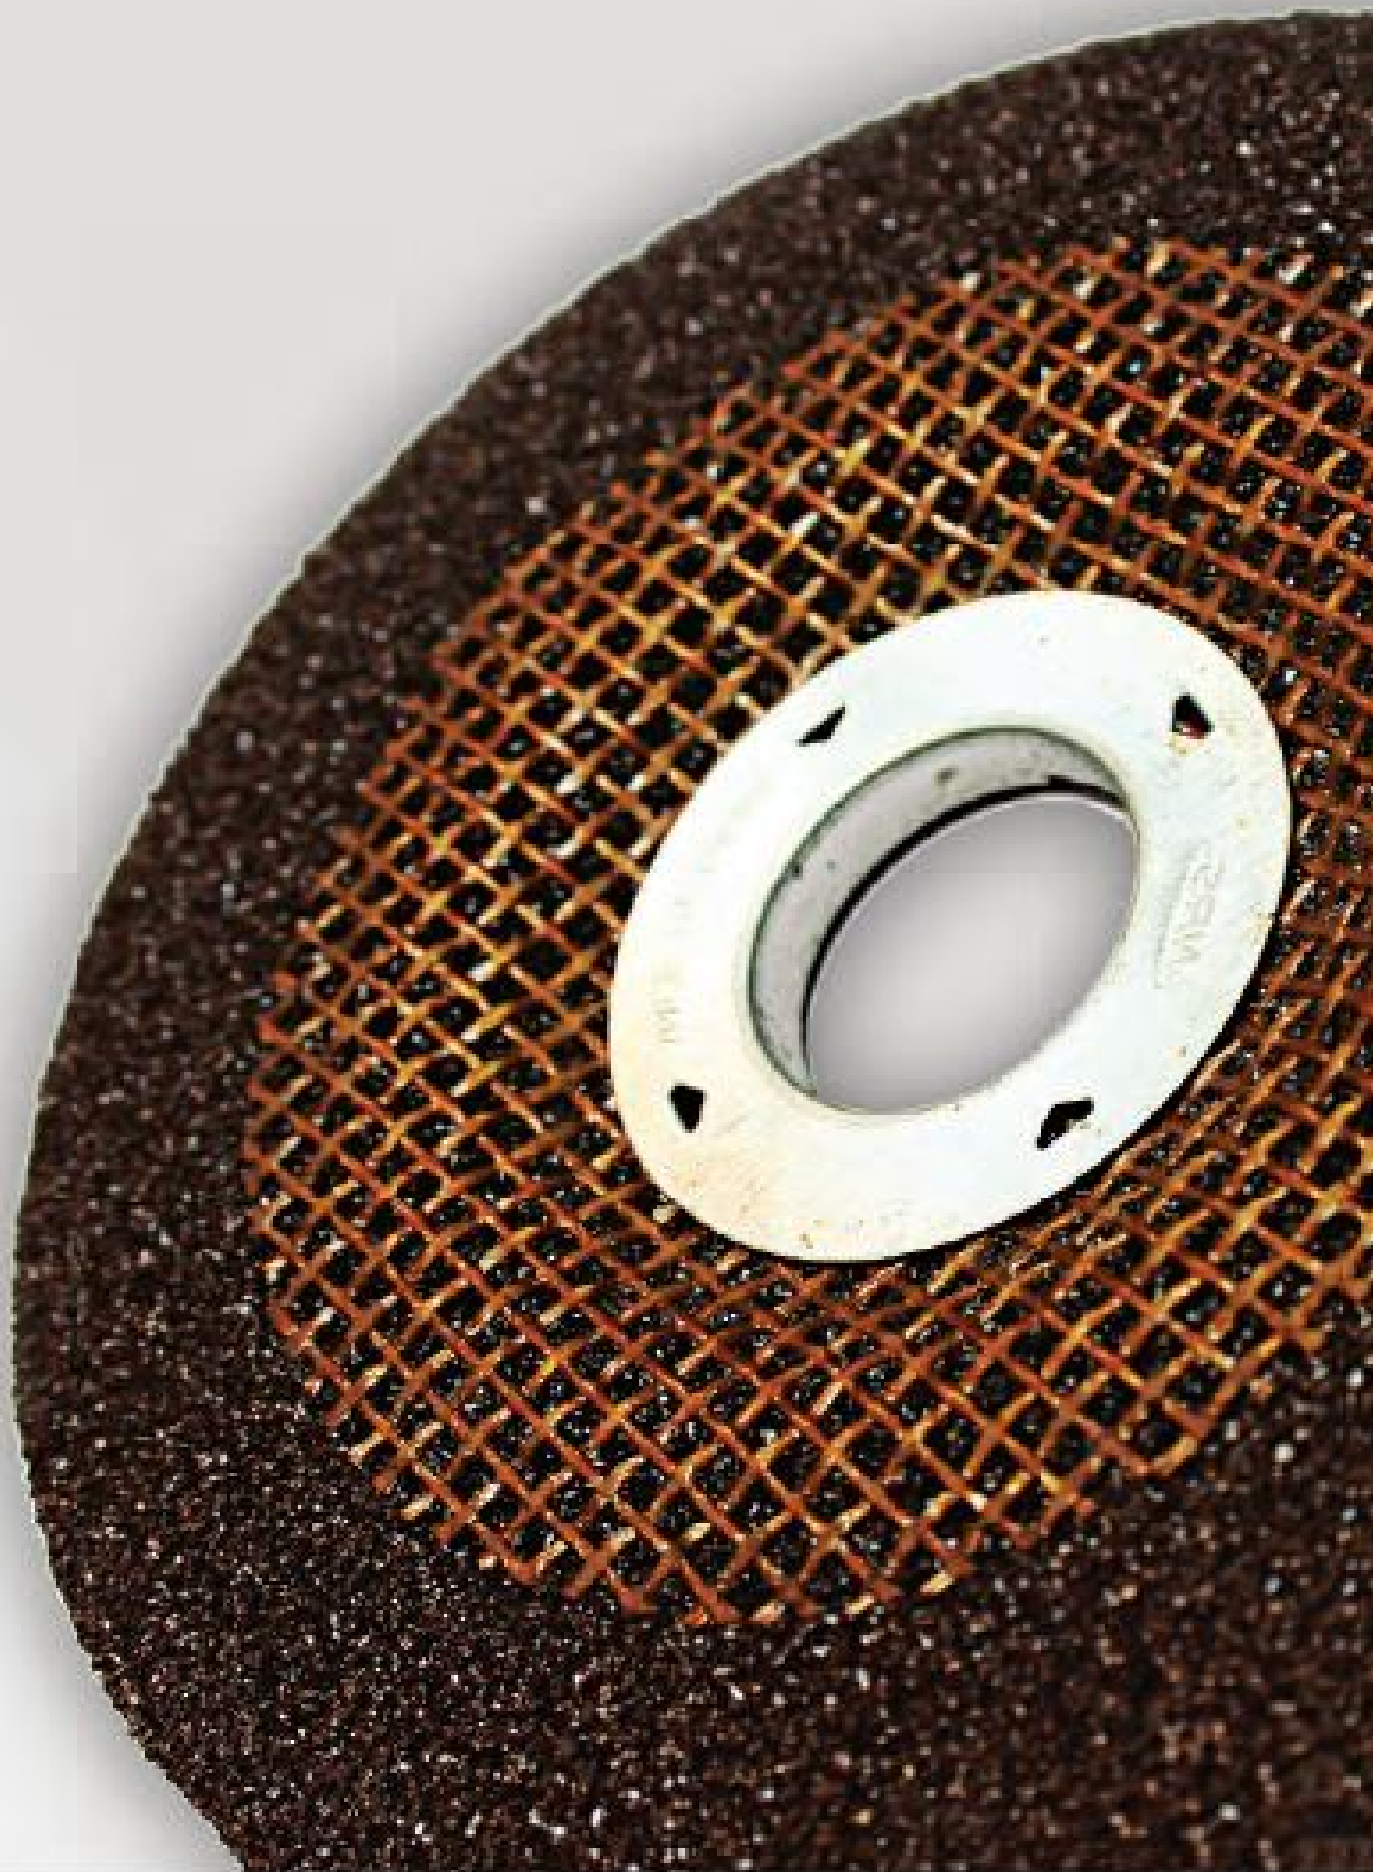

Grinding / Cutting: Abrasive Wheels

Abrasive cut-off wheel for portable cut-off

- For all ferrous materials - Steel, Cast iron and other hard metals



| Size (mm) | Grit | Pc. Per. Pack | Part No. |
|-------------|------|---------------|----------|
| 305 X 25. 4 | A36P | 25 | A-87650 |
| 355 X 25.4 | A36P | 25 | A-87672 |
| 405 X 25.4 | A36P | 25 | A-87694 |

Abrasive cut-off wheel for angle cutter / Cutter

- For cutting masonry materials, concrete, marble, slate, etc.

A: Reinforced with 3 sheets of fiberglass

B: Reinforced with 2 sheets of fiberglass



- It will be discontinued once the current stock is over

| Size (mm) | Material | Pc. Per. Pkg | Part No. |
|------------------|-------------------------|--------------|------------|
| 110 x 2.5 x 20 | Concrete, marble, slate | 10 | • 792153-6 |
| 305 x 3.2 x 25.4 | Steel | 5 | 792301-7 |
| 305 x 3.5 x 25.4 | Brick | 25 | A-89735 |

Sawing



Slide Compound Saw
LS1216L

355MM TCT METAL CUTTING SAW

DW872

Power Input 2200 watts

No Load Speed 1300 rpm

Wheel Diameter 355 mm

Max. Cutting Capacity at 90° Square 100 x 100 mm

Rectangular 75 x 130 mm

L-Shape 92 x 92 mm

Rounded 130 mm

Weight 22.5 kg



Portable Cut-off

203

2414NB 355mm (14") D-shape handle for easy gripping.

- Spark diversion guard for operator's safety.
- Adjustable guide plate 45 degrees right and left at 3 locations.
- Quick releases vise for secure stock retention and fast repeated cut-offs.
- Convenient storage space for Wrench.
- Adjustable depth stop for precise, repeatable cutting depth.



| | |
|-------------------------|---|
| Continuous rating Input | 2,000W |
| Wheel dia. | 355mm (14") |
| Hole dia. | 25.4mm (1") |
| No load speed (rpm) | 3,800 |
| Dimensions (L x W x H) | 500 x 280 x 600mm (19-11/16" x 11" x 23-5/8") |
| Net weight | 16.2kg (35.7lbs) |
| Power supply cord | 2.5m (8.2ft) |

Slide Compound Saw

153

LS1016 255mm (10") Large cutting capacity.

- Available for cutting 168mm(6-5/8") crown molding leaning against fence.
- Available for cutting 120mm(4-3/4") base board with standing.
- Sturdy structure by using 4 slide poles.
- Smooth and accurate cut by 6 liner ball bearings.



| | |
|-------------------------|--------------------------------|
| Continuous rating Input | 1,510W |
| Capacity | at 0 degrees |
| | : 91 x 279mm (3-5/8" x 11") |
| | at 45 degrees |
| | : 91 x 197mm (3-5/8" x 7-3/4") |
| Blade diameter | 250 - 260mm (9-7/8" - 10-1/4") |
| No load speed (rpm) | 3,200 |
| Dimensions | 718 x 640 x 671mm |
| (L x W x H) | (28-1/4" x 25-1/4" x 26-1/2") |
| Net weight | 23.7kg (52.2lbs) : LS1016L |
| | 23.6kg (52.0lbs) : LS1016 |
| Power supply cord | 2.5m (8.2ft) |



Metal Cut-off Grinder Bosch GCO 240 Professional

Redefining power in 14" cut-off saws

1

High overload capacity for the toughest of applications

2

Stable on uneven cutting surfaces

RP1800 12.7mm - 1/2" Plunge Router



- Linear ball bearing for super-smooth plunge action
- Precision cutting depth adjustment, cutting depth is adjustable in 0.1 mm increments
- Easy to read cutting depth scale
- Quick depth setting button
- Tool-less one touch change of template guide

Included accessories: Straight guide (342428-9), 1/2" collet (763808-0), 1/2" to 1/4" collet sleeve (781030-7), wrench (781030-7)

Router (Plunge type)

107

RP0900 8mm (3/8") High durability and good design router.

- 0-35mm(0-1/8") plunge depth capacity with 3 adjustable depth stops for repetitive depth routing.
- Scale level for adjusting the depth of routing



| | |
|-------------------------|---------------------------------|
| Continuous rating Input | 900W |
| Capacity | Collet : 8mm or 3/8" |
| Base | 145 x 110mm (5-3/4" x 4-5/16") |
| No load speed (rpm) | 27,000 |
| Dimensions | 256 x 110 x 217mm |
| (L x W x H) | (10-3/32" x 4-5/16" x 8-17/32") |
| Net weight | 2.6kg (5.9lbs) |
| Power supply cord | 2.5m (8.2ft) |



UB1102 - Blower



Technical Specification

| | |
|-------------------------|-----------------------------------|
| Continuous rating Input | 600W |
| Air volume | 4.1m ³ /min |
| Air pressure | 5.7kPa (580mm H ₂ O) |
| No load speed | 16,000rpm |
| Dimensions (L x W x H) | 479x185x178mm (18-7/8"x7-1/4"x7") |
| Net weight | 2.0kg (4.3bs) |
| Power supply cord | 2.5m (8.2ft) |

EAk



Capacity 16 kg, Ø 225 mm. With handle. With high pressure hose (1500 mm), valve, rigid spout and 4 jaws coupler. Suitable to all type of grease NLGI0, NLGI1, NLGI2, NLGI3. The pedal allows you to pump the grease with little effort and keep your hands free

Manual Fluid Extractor 9.0 Liter



- Clean and simple way to evacuate and dispense fluids
- Perfect for Boats or Personal Watercraft or any application with no drain plug
- Manual fluid extractor can be used to extract many kinds of non-explosive liquids
- Includes 3 Tubes And 3 Adaptors (blue end caliper bleeder adapter for brake bleeding)
- New safety design, when the tank is full of liquid, the vacuum will be shut off automatically.



90L Oil Drainer

Height range:
124 - 176mm
Steel drum
MCOS1011

Oil Drain Facility

Height range:
103 - 170mm
For use with
a drum
MCOS1012



The automatic hose reels model MP are suitable to distribute air for professional use.

The hose reels rewind automatically the hose by a spring located in the drum. The hose can be stopped at the desired length. The hot-galvanized steel structure is moulded and coated with electrostatic polyester powder resistant to UV rays. The parts in contact with the fluid are all made with material resistant to corrosion.



EAK

MICHELIN PRESSURE WASHER MPX 120 L

Michelin, leading global tire manufacturer is committed to making travel safer, more efficient and more enjoyable. That is why it has developed a comprehensive collection of products to offer you even more comfort, protection and styling.





Flygt 2700 range

Abrasive and corrosion resistant drainage pumps

Flygt 2700 pumps handle large flows up to 80 l/s (1000 GPM), high heads to 75 m (250 ft.), and solids up to 80 mm (3.2 in.) in diameter. Available with power ratings from 1.5 to 5.6 kW, 50 hz (3.1 to 13 hp, 60 hz), these abrasive and corrosion resistant pumps are engineered for acidic and abrasive dewatering applications in mines, power stations, paper mills, steel mills and chemical plants.

EAK



**1.5" DIAPHRAGM PUMP
STAINLESS STEEL**



Item: SS1-25

Max. suction lift: dry 4m/ wet 8m

(Suction height changes with the different combinations of ball, seat and the diaphragm materials.)

Max. size pumpable solids: 4mm

Suction and discharge size: 1" /Npt /F


Air inlet size 1/2"

Max. flow rate: 157 L/min

Max. head : 84m

Max. air inlet pressure: 8.4bar

Max. air consumption 60scfm (1.7m³/min)

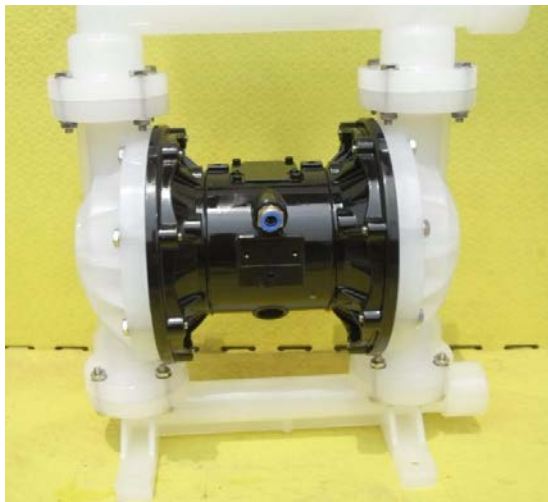



Abac Air Compressor - 3HP - Static Belt Drive - 200 Litre

| | |
|---------------------|-------------------|
| Motor HP | 3.0 |
| Air Receiver Litres | 200 |
| Displacement CFM | 13.0 |
| Free Air CFM | 9.0 |
| Electrical Phase | 1 |
| Dimensions (mm) | 1520 x 540 x 1040 |



EAk

ABAC MONTECARLO B20

Base line range Base Line products are the solution to meet the needs of all hobbyists. Simple and reliable compressed air.

Highlights:

- Pump Oil Lubricated
- Motor 2hp - 1.5kw
- Voltage 230/50/1 13amp Plug
- Tank Size 50 ltrs
- Output 190l/min - 6.7cfm Displacement
- Max Working Pressure 8 Bar
- dB(A)
- 32kg





- Large wheels and convenient handle make transport easy
- Simple, user friendly controls
- Suitable for all home and hobby applications
- Powerful machine with a 2 Hp lubricated pump
- Direct Driven Lubricated Compressor
- 50-litre tank for a large air reserve

EAK

Black & Decker BD 195/5 MY T portable electric air compressor - 1.5 hp motor - 5 L



Direct drive - absorbed air: 180 L/min - 10 bar - 1.5 hp - 5 litre tank - hobby range - mini air compressor. Free items: oilless air compressor maintenance kit





EP450 Heavy Duty Electric Airless Putty Sprayer, it is electric Piston Pump but with long piston rod, low suction valve system. Ideal for spraying high viscosity materials, such as putty / drywall mud / gypsum / white cement / lime based / floor epoxy / fireproofing / anti-corrosive paint / emulsions and fillings etc.

**EP450 PUTTY /PLASTER AIRLESS PAINT SPRAY
MACHINE. CHINA PAINTING SPRAYER FOR
WALL.**

| EP-450 Electric piston Pump Airless Paint Spayer | |
|--|--|
| Mode | EP450TX |
| Power Source : | Electric Motor & Piston Pump |
| Motor Power : | 2800W/3.7HP |
| Power requirement : | 220V/50 HZ |
| Max.Delivery : | 6L/min |
| Max.Working pressure : | 227bar |
| Motor speed: | 4200 |
| Max nozzle size: | 0.037" |
| Equipped with | spray gun, spray tip, tip guard, suction hose,high pressure hose |
| G. W. | 74kg |



EAK

EAK

"THE BEST SERVICE" IS OUR STRONG BACKING,
BUT ALSO IN OUR BUSINESS IS ONE OF THE
IMPORTANT ELEMENTS.



EAK

10 AMP 3 Phase 5 Pin Round Extension Socket



- 500 Volt
- 10 Amp
- 5 Pin Round Pin
- Straight Extension Socket



Description:

5 Pin Straight PLUG - Three Phase IP66

Special Instructions:

IP66 5 pins three phase straight plug.

Available Options:

20 Amp 5 pin

40 Amp 5 pin





**SWITCHED SOCKET
OUTLET COBINATION
20 AMP 500V 5 ROUND
PIN IP66.**

Multiple-out socket



Product description

General Introduction:

1. High performance PP engineering plastics, robust and reliable, good electrical insulation
2. Good quality copper alloy pin ensures lower temperature rise and high electrical conductivity
3. Cost effective wiring solution for indoor and outdoor application
4. PA nylon material available
5. Ideal for use in camper vans and refrigerated vans, power tools, workshop, engineering, compressors, etc.

The data:

16A

Input: 1.- 1 EEC form the power plug | 16 to 3 pins

2. output - 3 EEC form the 3-pin 16A power outlets

32A

Entry: 1.- 1 EEC form the plug of 32 to 3 pins

2. outgoing - 3 Form of the EEC the sockets of 32 to 3 pins

High Quality Weatherproof Powerpoint Switched 2 Gang Socket-Outlet

Weatherproof Switched Socket-Outlet / Powerpoint



2GANG 15A

switched socket-
outlet switched socket-
outlet switched socket-
outlet switched socket-outlet

Approval: SAA

Certificated to AS/NZS 3112
and AS/NZS 3133

Rated Voltage: 250V AC

switched socket-
outlet switched socket-
outlet switched socket-
outlet switched socket-
outlet

Rated Frequency: 50/60Hz

IP Protection: IP53

| | |
|---|--|
|  | <p>BREAKER CIRCUIT AUB7R 1P+N 6A 30 MA</p> |
|  | <p>Breakers Schneider 6Amp and 20 Amp spare parts for light towers</p> |
|  | <p>CENTRE PUNCH TOOL FOR SS304 CLAMPS</p> |
|  | <p>CLAMP-CP304-051 CENTRE PUNCH CLAMP SS304 SIZE 51</p> |
|  | <p>CENTRE PUNCH CLAMP SS304 SIZE 89</p> |
|  | <p>CENTRE PUNCH CLAMP SS304 SIZE 102</p> |

FAK

YATO Cable reel 50 m YT-8108

25M ARE AVAILABLE

Color: Black, blue and red

Material: Plastic reel and handle + metal support

Dimensions: 30 x 22 x 42 cm (W x W x H)

Cable length: 50 m

Current / maximum voltage: 16 A / 230 V

Maximum load capacity: 1200 W (rolled) - 3600 W (unwrapped)

Operating temperature: $56 \pm 5^{\circ} \text{C}$

Protection class: IP44

H05RR-F 3G2.5 Cable

French type E outlets (grounded)

Overheating protection


With lids for extra protection

SKU: 408114

YATO brand

Ref. ManoMano ME3245457 (YT-8108).



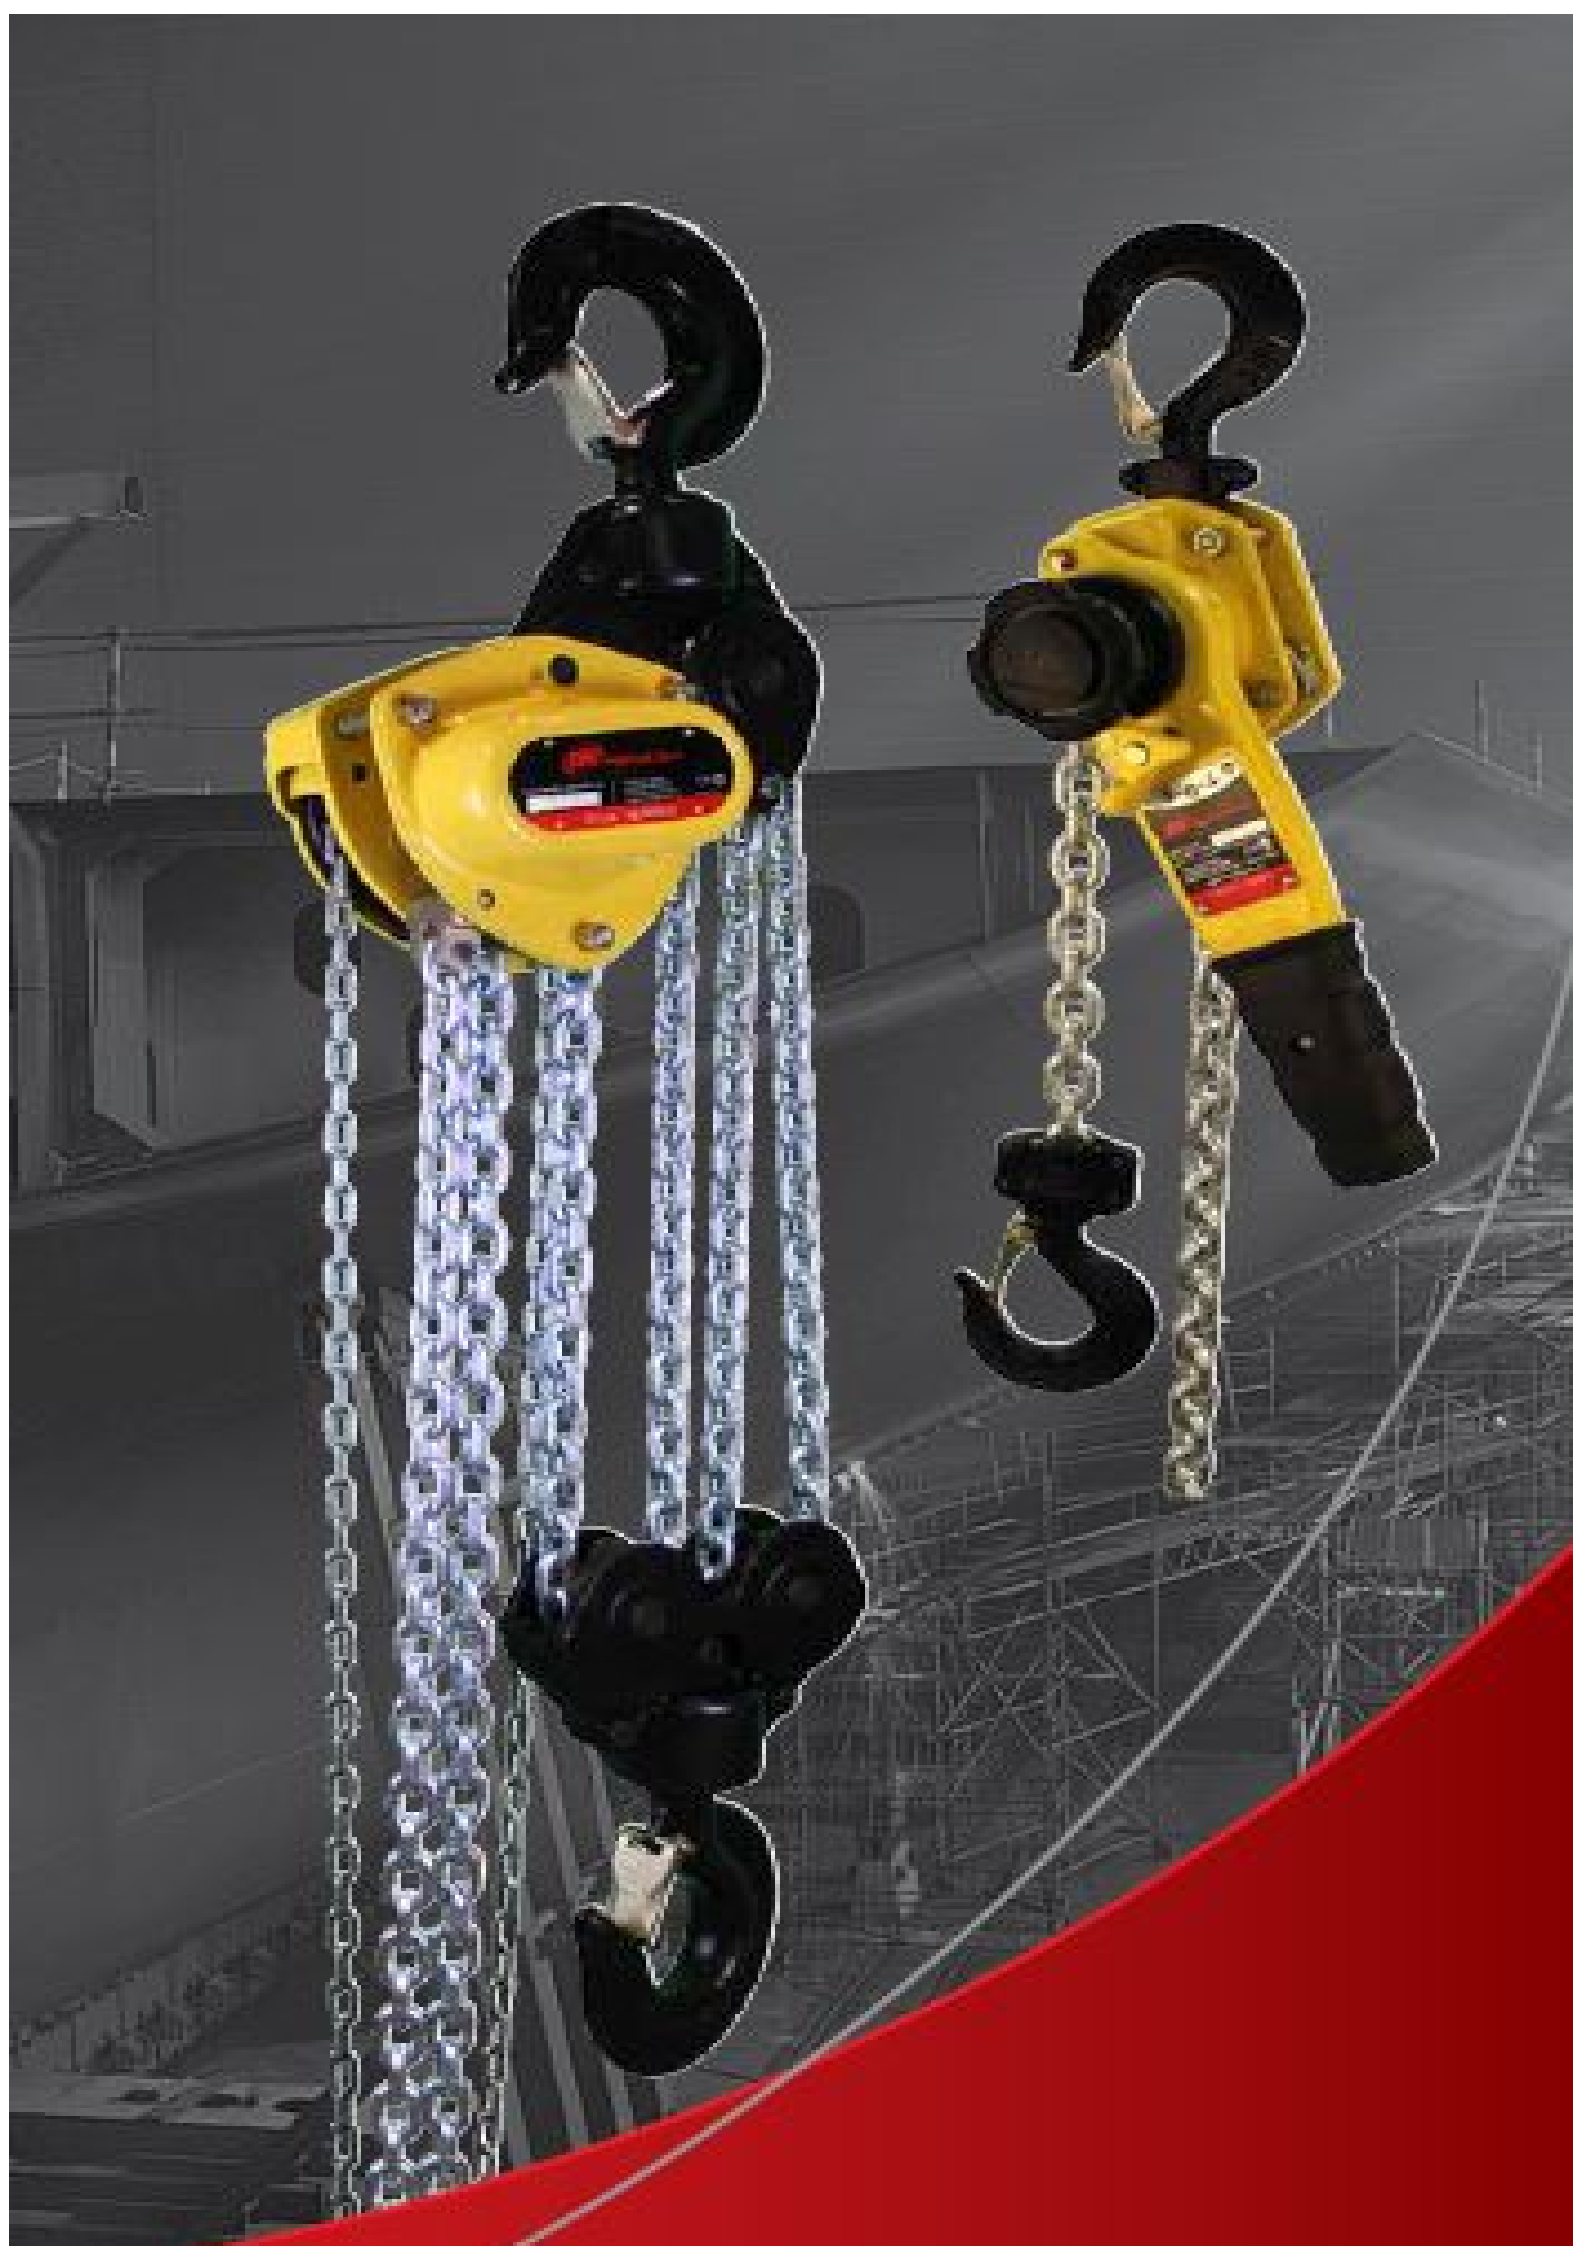

CF Hand Chain Hoist

1/2 through 5 Ton capacity

Harrington CF hand chain hoists give you a practical alternative thanks to an economical design using fewer parts for trouble-free service. Outstanding durability is due to a die-cast aluminum body and high-strength, heat-treated main pinion shaft and load gear. Pre-lubricated ball bearings, precision machined gears, and Weston-style load brake make lifting smooth and easy while allowing long service and low maintenance.

Many Benefits From More Features:

- Experience exceptional strength with a thick die-cast aluminum body.
- Handle tough demands with high-strength, heat-treated main pinion shaft and load gear.
- Get positive braking action with Weston-style load brake incorporating two moisture-resistant brake pads with four braking surfaces.
- Minimize manual effort thanks to smooth running, pre-lubricated ball bearings, and precision machined drive train components.
- Simplify maintenance with fewer parts and an easy-to-work-on design.

Capabilities To Count On:

- 10-foot lift is standard, 15- and 20-foot lifts are also stocked; nonstandard lifts and hand chain drops available as well.
- Grade 100 heat-treated manganese alloy load chain resists abrasion and wear while minimizing chain weight.
- Forged and heat-treated alloy steel hooks are designed to open slowly and not fracture under excessive loads.
- Test certificate verifies that every hoist has been factory load tested to 125% of rated capacity, in accordance with ASME B30.16 requirements.

Options: (See Pages 28-29)

- Chain container
- Corrosion-resistant chain
- Inspection hook





Kinetic Series manual chain hoists

0.25 to 20 metric ton lifting capacities

Ingersoll Rand Kinetic Series premium manual chain hoists are engineered for the harshest of environments and deliver exceptional durability to meet your toughest demands. With grade 100 Electro-galvanized chain, cast hook latches, all steel construction and extensive use of bearings these hoists are designed to LAST with minimal down time.

Kinetic Series hoists; Safe, Compact, Durable.

Features

- All steel construction for exceptional durability and light weight
- Reinforced double pawl brake with large diameter pawl springs for a highly dependable brake system
- Single chain fall through 3 metric tons
- Full bearing construction on load sprockets and pinion shaft for reduced pull effort and longer life
- Premium grade 100, Electro-Galvanized chain designed for exceptional corrosion resistance for increased durability.
- Heavy duty cast hook latches designed for less latch replacements
- CE certified; hoists meet or exceed regional requirements including ASME B30.16, HST-2M.





**Overload protection
device for option**

Manual Hoist

HSZ-B Chain Block 0.5~20T

- Model: HSZ-B
- Capacity: 0.5~20T
- Standard lift is 10 ft(3m). Additional lift is available.
- Compact size and light weight
- High strength, grade 80 alloy steel load chain
- Hooks are alloy steel , heat treated and equipped with hook latches and inspection points
- Our manual hoist meets or exceeds international standard.




THE TORCON OVERLOAD PROTECTION SAFETY DEVICE ENGAGES WHEN THE HOIST IS OVERLOADED, HELPING TO PREVENT DAMAGE TO THE HOIST, AS WELL AS INJURY TO PERSONNEL.



- Grade 105 galvanized load chain, which adheres to the strict German DIN 5684 standard.
- Free spooling, which automatically brakes when a load is applied.
- Hoist body has an electro-deposited black finish for corrosion resistance
- Internal side plates have hardened steel bushings for excellent load shave & pinion support
- Internal side plates, pinion, pawls, and pawl springs have an electro-deposited coating that helps resist corrosion
- Internal disc hub and ratchet wheel are nickel plated for corrosion resistance

EAK

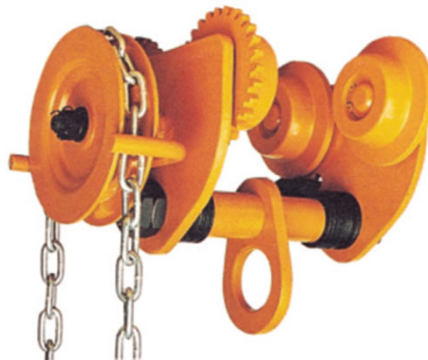

FAK



◆Foldable Hand Cart◆6 Type/Trolley/Travel cart/Push Pull Cart Hand singapore Mul
tifunctional Retractable Shopping Trolley Portable Foldable Hand Trolley Carts Alu
minum Alloy Travelling Luggage Carts



EA

PROFESSIONALS PREFER POWERWELD

**QUALITY
WELDING,
SAFETY AND
INDUSTRIAL
SUPPLIES**

POWERWELD

QUALITY WELDING, INDUSTRIAL & SAFETY PRODUCTS SINCE 1981



EAKE



SKECHERS

**WORK
FOOTWEAR**

SHOP NOW



AVAILABLE IN
WIDE WIDTH
WITH **MEMORY FOAM**







Flip Front Welding Face Shield

Lens size:
108 x 51mm
TOOW4242



Auto Darkening Welding Face Shield

(Non adjustable)
Fixed shade of DIN
10/11 & clear state
shade DIN 4
EWHEL0005



Auto Darkening Welding Face Shield

(Fully adjustable)
Variable shade of DIN 9
– 13 & clear state shade
DIN 4, Grinding function
EWHEL0007



FRAGRAM Auto Darkening Welding Face Shield

Light states:
DIN 4
Dark states:
DIN 9–13
TOOW4244



Auto Darkening Welding Face Shield

(Adjustable)
Variable shade of DIN 9
– 13 & clear state shade
DIN 4, Grinding function
EWHEL0006

3M



3M



DELTA PLUS



EAK



| Description | Item Number |
|-------------------------|-------------|
| 4,0 x 305 mm - 100 pack | W054915 |
| 5,0 x 305 mm - 100 pack | W054934 |

size 3 are available too

EAK

PRODUCT DETAILS:

Brand

Weldman

Input Supply Voltage

320 V

Welding Type

Arc Welder

Frame Material

Iron



We are offering a comprehensive **Weldman MMA 400 Welding Machine** at very reasonable price **EAK COMPANY**

STANLEY® FATMAX® SPECIALTY HAMMERS



STANLEY
FATMAX

Anti-Vibe® Drilling Hammer - 3 lbs

- Vibration dampening particulate in handle dampens vibrations better than solid core handles
- Anti-Vibe® handle grip helps reduce vibration occurrence
- Bullet nose strikeface provides 50% more power versus traditional heads
- Shatterproof fiberglass handle provides better durability versus wood handles

| SKU # | OVERALL LENGTH | | HEAD WEIGHT | | BOX QTY | CTN QTY | UPC |
|-----------|----------------|--------|-------------|--------|---------|---------|--------------|
| FMHT56006 | 11 in | 279 mm | 3 lbs | 1360 g | 1 | 2 | 076174560060 |



STANLEY
FATMAX

Anti-Vibe® Engineer Hammer - 4 lbs

- Vibration dampening particulate in handle dampens vibrations better than solid core handles
- Anti-Vibe® handle grip helps reduce vibration occurrence
- Bullet nose strikeface provides 50% more power versus traditional heads
- Shatterproof fiberglass handle provides better durability versus wood handles

EAK



EA[®]

DynaGrip Threadlocker - High Strength, Red, 10mL



Medium/High Strength Threadlocker

Fills gaps up to 0.25mm around bearing housings protecting against loosening

Resistant to oil, water, transmission fluids, glycol products & mild acids

Works within a temperature range of -59°C to 148°C

| | |
|---|--|
|  | CENTRE PUNCH CLAMP SS304 SIZE 114 |
|  | 4" HOSE CLAMP |
|  | 3.0 INCH RUBBER 20 BAR PRESSURE WATER AIR HOSE 20M LONG |
|  | 4.0 INCH RUBBER 20 BAR PRESSURE WATER AIR HOSE 20M LONG |
|  | 1 INCH HOSE CONNECTOR 20 BAR CARBON STEEL |
|  | 2.5 INCH HOSE CONNECTOR 20 BAR CARBON STEEL |

| | |
|---|---|
|  | <p>3 INCH HOSE CONNECTOR 20 BAR CARBON STEEL</p> |
|  | <p>1inch 20bar pressure water air hose 20m long with 25mm hosetail and ss304 punch lock clamps-sure</p> |
|  | <p>2.5 inch 20 bar pressure water air hose 20 m long with type E 316 stainless steel camlock both ends and SS304 double punch lock clamps</p> |
|  | <p>3.0 inch 20 bar pressure water air hose 20mlong with typeE 316 stainless steel camlock both ends and SS304 double punch lock clamps</p> |
|  | <p>camlock 2.5 INCH SS316 TYPE B</p> |
|  | <p>CAMLOCK 2.5 INCH JOINER - DD</p> |

| | |
|---|--------------------------------------|
|  | <p>CAMLOCK 2.5 INCH SS316 TYPE D</p> |
|  | <p>CAMLOCK 3 INCH SS316 TYPE B</p> |
|  | <p>CAMLOCK 3 INCH SS316 TYPE D</p> |
|  | <p>CAMLOCK 3 INCH SS316 TYPE E</p> |
|  | <p>CAMLOCK 3 INCH SS316 TYPE F</p> |
|  | <p>CAMLOCK 3.0 INCH JOINER - DD</p> |

| | |
|---|---|
|  | CAMLOCK 4 INCH SS316 TYPE B |
|  | CAMLOCK 4 INCH SS316 TYPE E |
|  | 1 INCH BALL VALVE WITH BSP FEMALE ENDS 40 BAR |
|  | 2.5 INCH CAMLOCK CLIP |
|  | 3.0 INCH CAMLOCK CLIP |
|  | CAMLOCK LEVER AND PINS FOR 2.5 INCH CAMLOCK |



CAMLOCK LEVER AND PINS FOR 3.0 INCH CAMLOCK



CAMLOCK SEAL 2.5INCH



CAMLOCK SEAL 3.0INCH



5 MM HOSE TAIL END-surelock compatible




10 MM HOSE TAIL END-surelock compatible


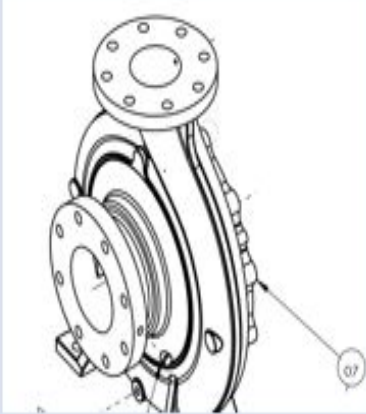

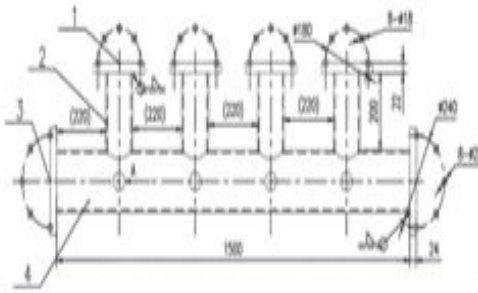



25MM HOSE TAIL END-surelock compatible

| | |
|---|--|
|  | <p>HOSE COUPLING 15mm female end BSP surelock compatible</p> |
|  | <p>HOSE COUPLING 15mm male end BSP surelock compatible</p> |
|  | <p>HOSE COUPLING 25mm female end BSP surelock compatible</p> |
|  | <p>HOSE COUPLING 25mm male end BSP-surelock compatible</p> |
|  | <p>HOSE COUPLING 50mm female end BSP-surelock compatible</p> |
|  | <p>metal clip for hose fittings</p> |


| | |
|---|---|
|  | <p>10 -32MM NBR GASKET-surelock compatible</p> |
|  | <p>AMMS:NBR-GAS-40-50MM: NBR GASKET</p> |
|  | <p>UNDERGROUND CABLE HANGING CLIP 100PER BOX</p> |
|  | <p>90kw centrifugal pump chrome iron pump with ceramic backplate 100mm STRIKER PUMP 100X65-315, 90KW IE3 1000V MOTOR IP65</p> |
|  | <p>FLOWMETER FIXED WITH SM-1</p> |
|  | <p>MECHANICAL SEAL FOR STRIKER PUMP</p> |

| | |
|---|---|
|  | <p>STAINLESS STEEL SHAFT FOR STRIKER PUMP</p> |
|  | <p>BACKPLATE FOR STRIKER PUMPS CHROME IRON</p> |
|  | <p>COUPLING ISO 65MM X 115MM FLANGE TO SUIT 65 DIA SHAFT STRIKER PUMP</p> |
|  | <p>IMPELLER NUT-ITEM 11 STRIKER PUMP</p> |
|  | <p>IMPELLER-100X65-315 CHROME IRON FOR STRIKER PUMP</p> |


| | |
|---|--|
|  | <p>IMPELLER-125X100-315 CHROME IRON FOR STRIKER PUMP</p> |
|  | <p>frame plate striker pump item 7</p> |
|  | <p>ELEPHANT HOSE PIPE DN150*2M</p> |
|  | <p>Pipe1-1500mm length with 4 riser pipe PN16 galvanized</p> |

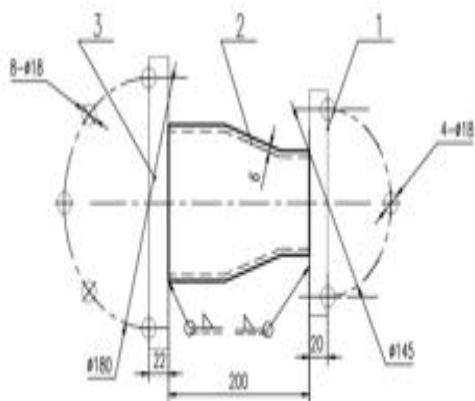


PIPE2-REDUCER DN150-DN100 GALVANIZED

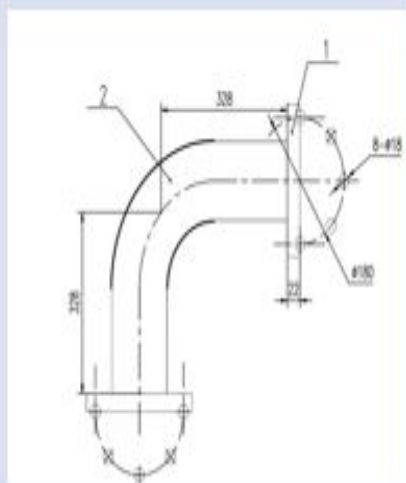


Pipe3-Elbow PN16 galvanized

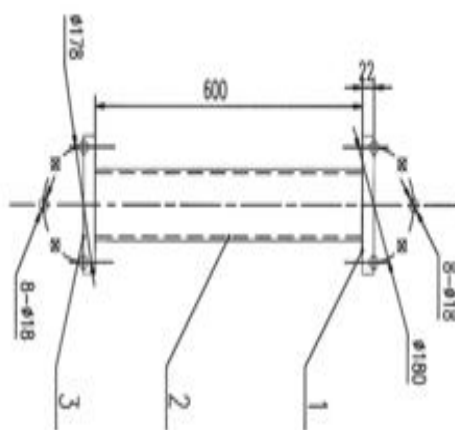

Pipe4-Riser pipe 600mm DN100 galvanized

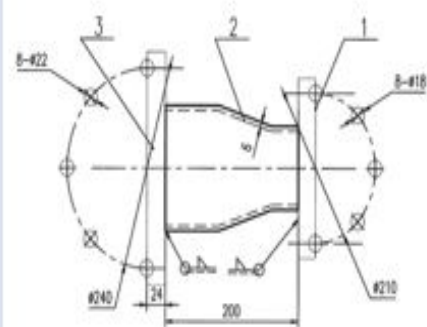

Pipe5-Reducer DN150-DN125 galvanized

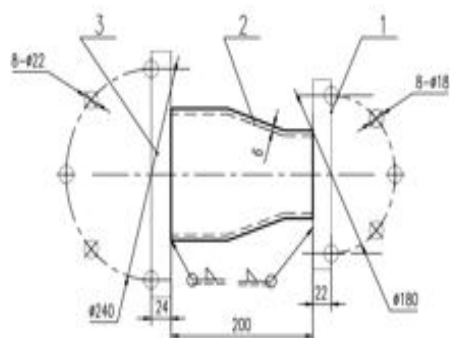

PIPE6-REDUCER DN100-DN65 GALVANIZED



Butterfly Valve PN16 100mm galvanized



Ball Check valve PN16 100mm galvanized



BOLT SET FOR MANIFOLD GALVANIZED



PN16 gaskets for flanges

FAK

STROBE LIGHT MAGNETIC AND SOLAR



SMOKE ALARM



Smoke Detectors For Your Safety



EA

Les camions Benne et les machines à louer



EAK

EAK